

# **Computational Logic**

## **Datalog with Negation**

**Free University of Bozen-Bolzano, 2010**

**Werner Nutt**

**(Slides by Thomas Eiter and Wolfgang Faber)**

## The Issue

- Queries like “complement of transitive closure” need both, recursion and negation
- Such queries cannot be expressed in datalog (monotonicity)
- Desired: Extension of datalog with negation

**Example:**  $ready(D) \leftarrow device(D), \neg busy(D)$

- Giving a semantics is not straightforward because of possibly cyclic definitions

**Example:**

$$\begin{aligned} single(X) &\leftarrow man(X), \neg husband(X) \\ husband(X) &\leftarrow man(X), \neg single(X) \end{aligned}$$

## Datalog<sup>¬</sup> Syntax

**Definition.** A *datalog<sup>¬</sup> program*  $P$  is a finite set of *datalog<sup>¬</sup> rules*  $r$  of the form

$$A \leftarrow B_1, \dots, B_n \tag{1}$$

where  $n \geq 0$  and

- $A$  is an atom  $R_0(\vec{x}_0)$
- Each  $B_i$  is an atom  $R_i(\vec{x}_i)$  or a *negated atom*  $\neg R_i(\vec{x}_i)$
- $\vec{x}_0, \dots, \vec{x}_n$  are vectors of variables and constants (from **dom**)
- every variable in  $\vec{x}_0, \dots, \vec{x}_n$  must occur in some atom  $B_i = R_i(\vec{x}_i)$  (“safety”)
- the head of  $r$  is  $A$ , denoted  $H(r)$
- the body of  $r$  is  $\{B_1, \dots, B_n\}$ , denoted  $B(r)$ , and
 
$$B^+(r) = \{R(\vec{x}) \mid \exists i B_i = R(\vec{x})\}, B^-(r) = \{R(\vec{x}) \mid \exists i B_i = \neg R(\vec{x})\}$$

$P$  has extensional and intensional relations,  $edb(P)$  resp.  $idb(P)$ , like a datalog program.

Remarks: – “ $\neg$ ” is as in LP often denoted by “not”

– Equality (=) and inequality ( $\neq$ , as  $\neg =$ ) are usually available as built-ins, but usage must be “safe”

## Datalog<sup>¬</sup> Semantics – The Problem

- **Idea:** Naturally extend the minimal-model semantics of datalog (equivalently, the least fixpoint-semantics) to negation
- Generalize to this aim the immediate consequence operator

$$\mathbf{T}_P(\mathbf{K}) : inst(sch(P)) \rightarrow inst(sch(P))$$

**Definition.** Given a datalog<sup>¬</sup> program  $P$  and  $\mathbf{K} \in inst(sch(P))$ , a fact  $R(\vec{t})$  is an *immediate consequence* for  $\mathbf{K}$  and  $P$ , if either

- $R \in edb(P)$  and  $R(\vec{t}) \in \mathbf{K}$ , or
- there exists some ground instance  $r$  of a rule in  $P$  such that
  - \*  $H(r) = R(\vec{t})$ ,
  - \*  $B^+(r) \subseteq \mathbf{K}$ , and
  - \*  $B^-(r) \cap \mathbf{K} = \emptyset$ .

(That is, evaluate “ $\neg$ ” w.r.t.  $\mathbf{K}$ )

## Problems with Least Fixpoints

- Natural trial: Define the semantics of datalog<sup>¬</sup> in terms of the least fixpoint of  $\mathbf{T}_P$ .
- However, this suffers from several problems:
  1.  $\mathbf{T}_P$  may not have a fixpoint:

$$P_1 = \{ \textit{known}(a) \leftarrow \neg \textit{known}(a) \}$$

2.  $\mathbf{T}_P$  may not have a least (i.e., single minimal) fixpoint:

$$P_2 = \left\{ \begin{array}{l} \textit{single}(X) \leftarrow \textit{man}(X), \neg \textit{husband}(X) \\ \textit{husband}(X) \leftarrow \textit{man}(X), \neg \textit{single}(X) \end{array} \right\}$$

$$\mathbf{I} = \{ \textit{man}(\textit{dilbert}) \}$$

3. The least fixpoint of  $\mathbf{T}_P$  including  $\mathbf{I}$  may not be constructible by fixpoint iteration (i.e., not as limit  $\mathbf{T}_P^\omega(\mathbf{I})$  of  $\{\mathbf{T}_P^i(\mathbf{I})\}_{i \geq 0}$ ):

$$P_3 = P_2 \cup \{husband(X) \leftarrow \neg husband(X), single(X)\}$$

$\mathbf{I} = \{man(dilbert)\}$  as above

Note: the operator  $\mathbf{T}_P$  is not monotonic!

## Problems with Minimal Models

There are similar problems for model-theoretic semantics

- We can associate with  $P$  naturally a first-order theory  $\Sigma_P$  as in the negation-free case (write rules as implications):

$$R(\vec{x}) \leftarrow (\neg)R_1(\vec{x}_1), \dots, (\neg)R_n(\vec{x}_n)$$

$\rightsquigarrow$

$$\forall \vec{x} \forall \vec{x}_1 \cdots \forall \vec{x}_n ((\neg)R_1(\vec{x}_1) \wedge \cdots \wedge (\neg)R_n(\vec{x}_n)) \rightarrow R(\vec{x})$$

- Still,  $\mathbf{K} \in inst(sch(P))$  is a model of  $\Sigma_P$  iff  $\mathbf{T}_P(\mathbf{K}) \subseteq \mathbf{K}$   
(and models are not necessarily fixpoints)
- However, multiple minimal models of  $\Sigma_P$  containing  $\mathbf{I}$  might exist  
(see the Dilbert example)

## Solution Approaches

Different proposals have been made to handle the problems above:

- **Give up single fixpoint/model semantics:** Consider alternative fixpoints (models), and define results by *intersection*, called *certain semantics*.

Most well-known: Stable model semantics (Gelfond & Lifschitz, 1988;1991).

Still suffers from 1.

- **Constrain the syntax of programs:** Consider only a fragment where negation can be “naturally” evaluated to a single minimal model.

Most well-known: semantics for stratified programs (Apt, Blair & Walker, 1988), perfect model semantics (Przymusinski, 1987).



- **Give up 2-valued semantics:** Facts might be true, false or *unknown*

Adapt and refine the notion of immediate consequence.

Most well-known: Well-founded semantics (Ross, van Gelder & Schlipf, 1991).

Resolves all problems 1-3

- **Give up fixpoint/minimality condition:** Operational definition of result.

Most well-known: Inflationary semantics (Abiteboul & Vianu, 1988)

## Semi-Positive Datalog

“Easy” case: Datalog $\neg$  programs where negation is applied only to *edb* relations.

- Such programs are called *semi-positive*
- For a semi-positive program,  $\mathbf{T}_P$  is monotonic if the *edb*-part is fixed, i.e.,  
 $\mathbf{I} \subseteq \mathbf{J}$  and  $\mathbf{I}|_{edb(P)} = \mathbf{J}|_{edb(P)}$  implies  $\mathbf{T}_P(\mathbf{I}) \subseteq \mathbf{T}_P(\mathbf{J})$

**Theorem.** Let  $P$  be a semi-positive datalog program and  $\mathbf{I} \in inst(sch(P))$ . Then,

1.  $\mathbf{T}_P$  has a unique minimal fixpoint  $\mathbf{J}$  such that  $\mathbf{I}|_{edb(P)} = \mathbf{J}|_{edb(P)}$ .
2.  $\Sigma_P$  has a unique minimal model  $\mathbf{J}$  such that  $\mathbf{I}|_{edb(P)} = \mathbf{J}|_{edb(P)}$ .

**Example**

Semi-positive datalog can express the transitive closure of the complement of a graph  $G$  with vertexes  $vert$  and edges  $edge$ :

$$neg\_tc(x, y) \leftarrow vert(x), vert(y), \neg edge(x, y)$$

$$neg\_tc(x, y) \leftarrow vert(x), \neg edge(x, z), neg\_tc(z, y)$$

## Stratified Semantics

- **Intuition:** For evaluating the body of a rule instance  $r$  containing  $\neg R(\vec{t})$ , the value of the “negated” relation  $R(\vec{t})$  should be known:
  1. evaluate first  $R$
  2. if  $R(\vec{t})$  is false, then  $\neg R(\vec{t})$  is true
  3. if  $R(\vec{t})$  is true, then  $\neg R(\vec{t})$  is false and the rule is not applicable.
- **Example:**

$$\begin{aligned} boring(chess) &\leftarrow \neg interesting(chess) \\ interesting(X) &\leftarrow difficult(X) \end{aligned}$$

For  $\mathbf{I} = \{\}$ , compute result  $\{boring(chess)\}$ .

- **Note:** this introduces *procedurality* (violates declarativity)!

## Dependency Graph for Datalog<sup>¬</sup> programs


Associate with each datalog<sup>¬</sup> program  $P$  a directed graph  $DEP(P) = (N, E)$ , called *Dependency Graph*, as follows:

- $N = sch(P)$ , i.e., the nodes are the relations
- $E = \{\langle R, R' \rangle \mid \exists r \in P: H(r) = R \wedge R' \in B(r)\}$ , i.e., arcs  $R \rightarrow R'$  from the relations in rule heads to the relations in the body
- Mark each arc  $R \rightarrow R'$  with “\*”, if  $R(\vec{x})$  is in the head of a rule in  $P$  whose body contains  $\neg R'(\vec{y})$

Remark: *edb* relations are often omitted in the dependency graph

**Example**

$P$ :  $husband(X) \leftarrow man(X), married(X).$   
 $single(X) \leftarrow man(X), \neg husband(X).$

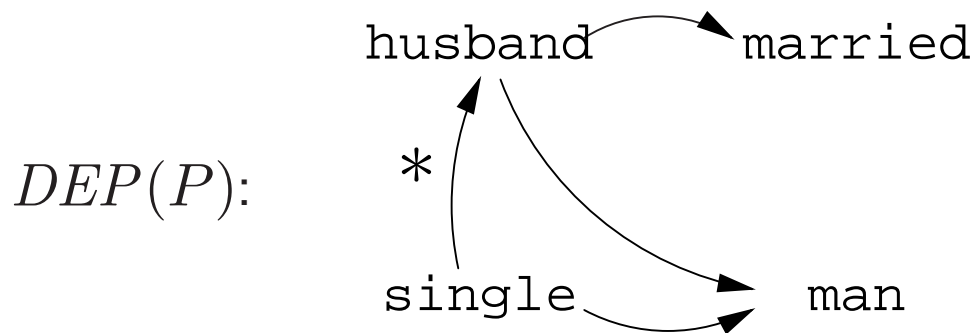

### Stratification Principle

If  $R = R_0 \rightarrow R_1 \rightarrow R_2 \rightarrow \dots \rightarrow R_{n-1} \rightarrow R_n = R'$  such that some  $R_i \rightarrow R_{i+1}$  is marked with “\*”, then  $R'$  must be evaluated prior to  $R$ .

## Stratification

**Definition.** A *stratification* of a datalog program  $P$  is a partitioning

$$\Sigma = (P_1, \dots, P_n)$$

of  $sch(P)$  into nonempty, pairwise disjoint sets  $P_i$  such that

1. if  $R \in P_i$ ,  $R' \in P_j$ , and  $R \rightarrow R'$  is in  $DEP(P)$ , then  $i \geq j$ ;
2. if  $R \in P_i$ ,  $R' \in P_j$ , and  $R \rightarrow R'$  is in  $DEP(P)$  marked with “\*,” then  $i > j$ .

The sets  $P_1, \dots, P_n$  are called the *strata* of  $P$  w.r.t.  $\Sigma$ .

**Definition.** A datalog program  $P$  is called *stratified*, if it has some stratification  $\Sigma$ .

## Evaluation Order

A stratification  $\Sigma$  defines an *evaluation order* for the relations in  $P$  (given  $\mathbf{I} \in inst(edb(P))$ ):

1. First evaluate the relations in  $P_1$  (which is  $\neg$ -free).  
 $\Rightarrow$  All relations  $R$  in heads of  $P_1$  are defined. This yields  $\mathbf{J}_1 \in inst(sch(P_1))$ .
2. Evaluate  $P_2$  considering relations in  $edb(P)$  and  $P_1$  as  $edb(P_1)$ ,  
 where  $\neg R(\vec{t})$  is true if  $R(\vec{t})$  is false in  $\mathbf{I} \cup \mathbf{J}_1$ .  
 $\Rightarrow$  All relations  $R$  in heads of  $P_2$  are defined. This yields  $\mathbf{J}_2 \in inst(sch(P_2))$ .
- ...
3. Evaluate  $P_i$  considering relations in  $edb(P)$  and  $P_1, \dots, P_{i-1}$  as  $edb(P_i)$ ,  
 where  $\neg R(\vec{t})$  is true if  $R(\vec{t})$  is false in  $\mathbf{I} \cup \mathbf{J}_1 \cup \dots \cup \mathbf{J}_{i-1}$ .
4. The result of evaluating  $P$  on  $\mathbf{I}$  w.r.t.  $\Sigma$ , denoted  $P_\Sigma(\mathbf{I})$ , is given by  $\mathbf{I} \cup \mathbf{J}_1 \cup \dots \cup \mathbf{J}_n$ .



**Example**

$$P = \{ \textit{husband}(X) \leftarrow \textit{man}(X), \textit{married}(X) \\ \textit{single}(X) \leftarrow \textit{man}(X), \neg\textit{husband}(X) \}$$

Stratification  $\Sigma$ :

$$P_1 = \{\textit{man}, \textit{married}\}, P_2 = \{\textit{husband}\}, P_3 = \{\textit{single}\}$$

$$\mathbf{I} = \{\textit{man}(\textit{dilbert})\}:$$

1. Evaluate  $P_1$ :  $\mathbf{J}_1 = \{\}$
2. Evaluate  $P_2$ :  $\mathbf{J}_2 = \{\}$
3. Evaluate  $P_3$ :  $\mathbf{J}_3 = \{\textit{single}(\textit{dilbert})\}$
4. Hence,  $P_\Sigma(\mathbf{I}) = \{\textit{man}(\textit{dilbert}), \textit{single}(\textit{dilbert})\}$

## Formal Definition of Stratified Semantics

Let  $P$  be a stratified datalog<sup>-</sup> program with stratification  $\Sigma = (P_1, \dots, P_n)$ .

- Let  $P_i^*$  be the set of rules from  $P$  whose relations in the head are in  $P_i$ , and set  $edb(P_1^*) = edb(P)$ ,  $edb(P_i^*) = rels(\bigcup_{j=1}^{i-1} P_j^*) \cup edb(P)$ ,  $i > 1$ .
- For every  $\mathbf{I} \in inst(edb(P))$ , let  $\mathbf{I}_0^\Sigma = \mathbf{I}$  and define

$$\begin{aligned}
 \mathbf{I}_1^\Sigma &= \mathbf{T}_{P_1^*}^\omega(\mathbf{I}_0^\Sigma) &= lfp(\mathbf{T}_{P_1^*}(\mathbf{I}_0^\Sigma)) &\supseteq \mathbf{I}_0^\Sigma \\
 \mathbf{I}_2^\Sigma &= \mathbf{T}_{P_2^*}^\omega(\mathbf{I}_1^\Sigma) &= lfp(\mathbf{T}_{P_2^*}(\mathbf{I}_1^\Sigma)) &\supseteq \mathbf{I}_1^\Sigma \\
 &\dots && \\
 \mathbf{I}_i^\Sigma &= \mathbf{T}_{P_i^*}^\omega(\mathbf{I}_{i-1}^\Sigma) &= lfp(\mathbf{T}_{P_i^*}(\mathbf{I}_{i-1}^\Sigma)) &\supseteq \mathbf{I}_{i-1}^\Sigma \\
 &\dots && \\
 \mathbf{I}_n^\Sigma &= \mathbf{T}_{P_n^*}^\omega(\mathbf{I}_{n-1}^\Sigma) &= lfp(\mathbf{T}_{P_n^*}(\mathbf{I}_{n-1}^\Sigma)) &\supseteq \mathbf{I}_{n-1}^\Sigma
 \end{aligned}$$

where  $\mathbf{T}_Q^\omega(\mathbf{J}) = \lim\{\mathbf{T}_Q^i(\mathbf{J})\}_{i \geq 0}$  with  $\mathbf{T}_Q^0(\mathbf{J}) = \mathbf{J}$  and  $\mathbf{T}_Q^{i+1} = \mathbf{T}_Q(\mathbf{T}_Q^i(\mathbf{J}))$ , and  $lfp(\mathbf{T}_Q(\mathbf{J}))$  is the least fixpoint  $\mathbf{K}$  of  $\mathbf{T}_Q$  such that  $\mathbf{K}|edb(Q) = \mathbf{J}|edb(Q)$ .

- Denote  $P_\Sigma(\mathbf{I}) = \mathbf{I}_n^\Sigma$

**Proposition.** For every  $i \in \{1, \dots, n\}$ ,

- $lfp(\mathbf{T}_{P_i^*}(\mathbf{I}_{i-1}^\Sigma))$  exists,
- $lfp(\mathbf{T}_{P_i^*}(\mathbf{I}_{i-1}^\Sigma)) = \mathbf{T}_{P_i^*}^\omega(\mathbf{I}_{i-1}^\Sigma)$ ,
- $\mathbf{I}_{i-1}^\Sigma \subseteq \mathbf{I}_i^\Sigma$ .

Therefore,  $P_\Sigma(\mathbf{I})$  is always well-defined.

Stratified semantics singles out a model, and in fact a minimal model.

**Theorem.**  $P_\Sigma(\mathbf{I})$  is a minimal model  $\mathbf{K}$  of  $P$  such that  $\mathbf{K}|_{edb(P)} = \mathbf{I}$ .

**Dilbert Example (cont'd)**

$$P = \{ \text{husband}(X) \leftarrow \text{man}(X), \text{married}(X) \\ \text{single}(X) \leftarrow \text{man}(X), \neg \text{husband}(X) \}$$

$$\text{edb}(P) = \{\text{man}\}$$

$$\text{Stratification } \Sigma: \quad P_1 = \{\text{man}, \text{married}\}, P_2 = \{\text{husband}\}, P_3 = \{\text{single}\}$$

1.  $P_1 = \{\}$
2.  $P_2 = \{\text{husband}(X) \leftarrow \text{man}(X), \text{married}(X)\}$
3.  $P_3 = \{\text{single}(X) \leftarrow \text{man}(X), \neg \text{husband}(X)\}$

$$\mathbf{I} = \{\text{man}(\text{dilbert})\}:$$

1.  $\mathbf{I}_1^\Sigma = \{\text{man}(\text{dilbert})\}$
2.  $\mathbf{I}_2^\Sigma = \{\text{man}(\text{dilbert})\}$
3.  $\mathbf{I}_3^\Sigma = \{\text{man}(\text{dilbert}), \text{single}(\text{dilbert})\}$

$$\text{Hence, } P_\Sigma(\mathbf{I}) = \{\text{man}(\text{dilbert}), \text{single}(\text{dilbert})\}$$

## Stratification Theorem

- The stratification  $\Sigma$  above is not unique.
- Alternative stratification  $\Sigma'$ :  

$$P_1 = \{man, married, husband\}, P_2 = \{single\}$$
- Evaluation with respect to  $\Sigma'$  yields same result!


The choice of a particular stratification is irrelevant:

**Stratification Theorem.** Let  $P$  be a stratifiable datalog<sup>⊖</sup> program. Then, for any stratifications  $\Sigma$  and  $\Sigma'$  and  $\mathbf{I} \in inst(sch(P))$ ,  $P_\Sigma(\mathbf{I}) = P_{\Sigma'}(\mathbf{I})$ .

- Thus, syntactic stratification yields semantically a canonical way of evaluation.
- The result  $P_{str}(\mathbf{I})$  is called the *perfect model* or *stratified model* of  $P$  for  $\mathbf{I}$ .

## Example: Railroad Network

Determine safe connections between locations in a railroad network

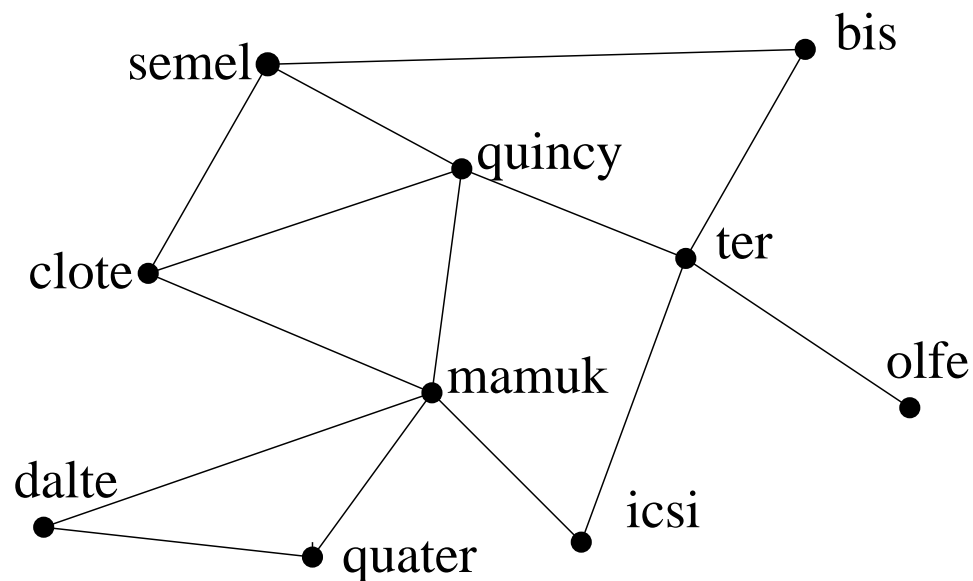

- **Cutpoint  $c$  for  $a$  and  $b$ :** if  $c$  fails, there is no connection between  $a$  and  $b$
- **Safe connection between  $a$  and  $b$ :** no cutpoints between  $a$  and  $b$  exist
- E.g.,  $ter$  is a cutpoint for  $olfe$  and  $semel$ , while  $quincy$  is not.

**Relations:**

$link(X, Y)$ : direct connection from station  $X$  to  $Y$  (edb facts)

$linked(A, B)$ : symmetric closure of  $link$

$connected(A, B)$ : there is path between  $A$  and  $B$  (one or more links)

$cutpoint(X, A, B)$ : each path from  $A$  to  $B$  goes through station  $X$

$circumvent(X, A, B)$ : there is a path between  $A$  and  $B$  not passing  $X$

$has\_icut\_point(A, B)$ : there is at least one cutpoint between  $A$  and  $B$

$safely\_connected(A, B)$ :  $A$  and  $B$  are connected with no cutpoint

$station(X)$ :  $X$  is a railway station

**Railroad program  $P$ :**

$$R_1 : \textit{linked}(A, B) :- \textit{link}(A, B).$$

$$R_2: \textit{linked}(A, B) :- \textit{link}(B, A).$$

$$R_3: \textit{connected}(A, B) :- \textit{linked}(A, B).$$

$$R_4: \textit{connected}(A, B) :- \textit{connected}(A, C), \textit{linked}(C, B).$$

$$R_5: \textit{cutpoint}(X, A, B) :- \textit{connected}(A, B), \textit{station}(X), \\ \neg \textit{circumvent}(X, A, B).$$

$$R_6: \textit{circumvent}(X, A, B) :- \textit{linked}(A, B), X \neq A, \textit{station}(X), X \neq B.$$

$$R_7: \textit{circumvent}(X, A, B) :- \textit{circumvent}(X, A, C), \textit{circumvent}(X, C, B).$$

$$R_8: \textit{has\_icut\_point}(A, B) :- \textit{cutpoint}(X, A, B), X \neq A, X \neq B.$$


$$R_9: \textit{safely\_connected}(A, B) :- \textit{connected}(A, B), \\ \neg \textit{has\_icut\_point}(A, B).$$

$$R_{10}: \textit{station}(X) :- \textit{linked}(X, Y).$$

Remark: Inequality ( $\neq$ ) is used here as built-in. It can be easily defined in stratified manner.



$DEP(P)$ :

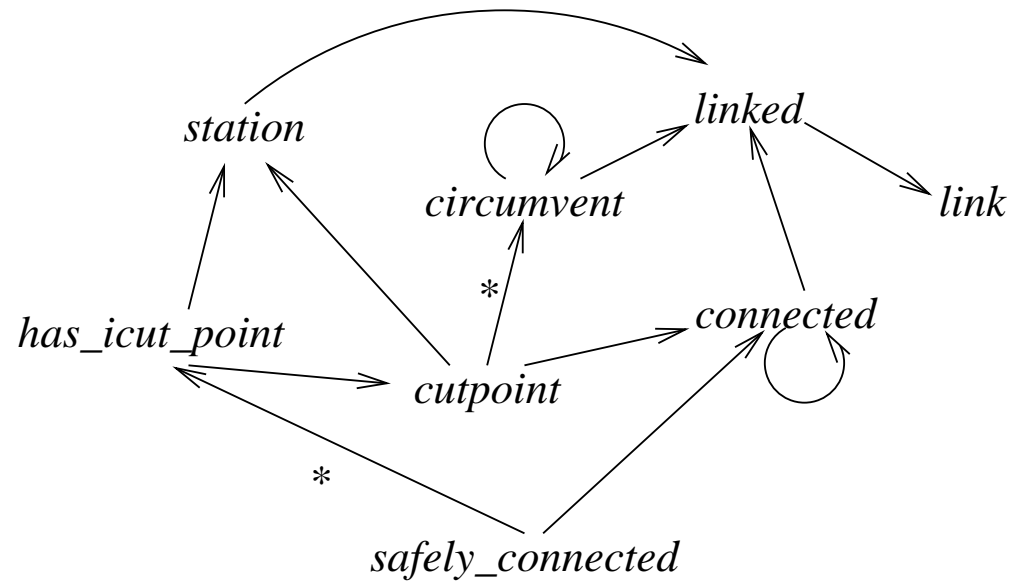

**Stratification  $\Sigma$ :**

$$P_1 = \{link, linked, station, circumvent, connected\}$$

$$P_2 = \{cutpoint, has_icut_point\}$$

$$P_3 = \{safely_connected\}$$

$$\mathbf{I}(\mathit{link}) = \{ \langle \mathit{semel}, \mathit{bis} \rangle, \langle \mathit{bis}, \mathit{ter} \rangle, \langle \mathit{ter}, \mathit{olfe} \rangle, \langle \mathit{ter}, \mathit{icsi} \rangle, \langle \mathit{ter}, \mathit{quincy} \rangle, \\ \langle \mathit{quincy}, \mathit{semel} \rangle, \langle \mathit{quincy}, \mathit{clote} \rangle, \langle \mathit{quincy}, \mathit{mamuk} \rangle, \dots, \langle \mathit{dalte}, \mathit{quater} \rangle \}$$

**Evaluation**  $P_{\Sigma}(\mathbf{I})$ :

1.  $P_1 = \{ \mathit{link}, \mathit{linked}, \mathit{station}, \mathit{circumvent}, \mathit{connected} \}$ :

$$\mathbf{J}_1 = \mathit{linked}(\mathit{semel}, \mathit{bis}), \mathit{linked}(\mathit{bis}, \mathit{ter}), \mathit{linked}(\mathit{ter}, \mathit{olfe}), \dots, \\ \mathit{connected}(\mathit{semel}, \mathit{olfe}), \dots, \mathit{circumvent}(\mathit{quincy}, \mathit{semel}, \mathit{bis}), \dots$$

2.  $P_2 = \{ \mathit{cutpoint}, \mathit{has\_icut\_point} \}$ :

$$\mathbf{J}_2 = \mathit{cutpoint}(\mathit{ter}, \mathit{semel}, \mathit{olfe}), \mathit{has\_icut\_point}(\mathit{semel}, \mathit{olfe}) \dots$$

3.  $P_3 = \{ \mathit{safely\_connected} \}$ :

$$\mathbf{J}_3 = \mathit{safely\_connected}(\mathit{semel}, \mathit{bis}), \mathit{safely\_connected}(\mathit{semel}, \mathit{ter})$$

But,  $\mathit{safely\_connected}(\mathit{semel}, \mathit{olfe}) \notin \mathbf{J}_3$

## Algorithm STRATIFY

**Input:** a datalog<sup>¬</sup> program  $P$ .

**Output:** a stratification  $\Sigma$  for  $P$ , or “no” if none exists.

1. construct the directed graph  $G := DEP(P) (= \langle N, E \rangle)$  with markers “\*”;
  2. **for each** pair  $R, R' \in N$  **do**
    - if**  $R$  reaches  $R'$  via some path containing a marked arc
    - then begin**  $E := E \cup \{R \rightarrow R'\}$ ; mark  $R \rightarrow R'$  with “\*” **end**;
3.  $i := 1$ ;
4. identify the set  $K$  of all vertices  $R$  in  $N$  s.t. no marked  $R \rightarrow R'$  is in  $E$ ;
5. **if**  $K = \emptyset$  and  $G$  has vertices left, **then** output “no”
  - else begin** output  $K$  as stratum  $P_i$ ;
  - remove all vertices in  $K$  and corresponding arcs from  $G$ ;
  - end**;
6. **if**  $G$  has vertices left **then begin**  $i := i + 1$ ; **goto** step 4 **end**
  - else** stop.

Runs in polynomial time!

## Inflationary Semantics for Datalog

**Idea:** Adopt a production-oriented view of datalog<sup>⊃</sup>, similar as in rule-based expert systems

- A rule should be applied (fired) if the premises (= body literals) are satisfied with respect to the current state
- Rather than applying one rule at a time (as in expert systems), fire *all* applicable rules in parallel
- New facts may fire other rules
- Repeat application of rules, until no more new facts are generated
- This amounts to the least fixpoint of the inflationary version of  $\mathbf{T}_P(\mathbf{K})$

For any datalog<sup>−</sup> program  $P$ , let  $\mathbf{T}_P^+ : inst(sch(P)) \rightarrow inst(sch(P))$  denote the inflationary variant of  $\mathbf{T}_P$ :

$$\mathbf{T}_P^+(\mathbf{K}) = \mathbf{K} \cup \mathbf{T}_P(\mathbf{K})$$

**Definition.** Given a datalog<sup>−</sup> program  $P$  and  $\mathbf{I} \in inst(edb(P))$ , the inflationary semantics of  $P$  w.r.t.  $\mathbf{I}$ , denoted  $P_{inf}(\mathbf{I})$ , is the limit of the sequence  $\{\mathbf{T}_P^{+i}(\mathbf{I})\}_{i \geq 0}$ , where  $\mathbf{T}_P^{+0}(\mathbf{I}) = \mathbf{I}$  and  $\mathbf{T}_P^{+(i+1)}(\mathbf{I}) = \mathbf{T}_P^+(\mathbf{T}_P^{+i}(\mathbf{I}))$ .

Notice:

- $P_{inf}(\mathbf{I})$  is well-defined for each program  $P$  and input database  $\mathbf{I}$ .
- $P_{inf}(\mathbf{I})$  is a model of  $P$  containing  $\mathbf{I}$ , but not necessarily a minimal model.
- $P_{inf}(\mathbf{I})$  is a (not necessarily minimal) fixpoint of  $\mathbf{T}_P^+$  containing  $\mathbf{I}$ .

**Example**

$$P = \{q(b) \leftarrow \neg p(a), \quad r(c) \leftarrow \neg q(b) \quad p(a) \leftarrow r(c), \neg p(b)\}$$

Consider  $\mathbf{T}_P^{+i}(\mathbf{I})$ ,  $i \geq 0$ , for  $\mathbf{I} = \emptyset$ :

- $\mathbf{T}_P^{+0}(\mathbf{I}) = \mathbf{I} = \{\}$ .
- The first two rules are applicable, as  $\neg p(a)$ ,  $\neg q(b)$  are satisfied wrt.  $\mathbf{I}_0$ .
- $\mathbf{T}_P^{+1}(\mathbf{I}) = \{q(b), r(c)\}$ .
- The third rule is now applicable, as  $r(c)$ ,  $\neg p(b)$  are satisfied wrt.  $\mathbf{I}_1$ .
- $\mathbf{T}_P^{+2}(\mathbf{I}) = \{q(b), r(c), p(a)\}$ .
- No new facts can be obtained, as all rules have been applied.
- Hence,  $P_{inf}(\mathbf{I}) = \mathbf{T}_P^{+2}(\mathbf{I})$ .

Note that  $P_{inf}(\mathbf{I})$  is not a minimal model of  $P$  containing  $\mathbf{I}$ .

**Example: One-Step-Behind Technique**

Undirected graph  $G = \langle V, E \rangle$ , distance  $d: V^2 \longrightarrow \{0, 1, 2, \dots\} \cup \{\infty\}$

( $d(x, y)$  = length of shortest path between  $x, y$  and  $\infty$  if no path exists)

Define  $shorter(x, y, x', y') \Leftrightarrow dist(x', y') < \infty$

Program  $P$  (with  $edb(P) = \{v, e\}$ , where  $e$  is symmetric):

$$t(x, x) \leftarrow v(x)$$

$$t(x, y) \leftarrow t(x, z), e(z, y)$$

$$t1(x, y) \leftarrow t(x, y)$$

$$shorter(x_1, y_1, x_2, y_2) \leftarrow t1(x_1, y_1), t(x_2, y_2), \neg t1(x_2, y_2)$$

$t1(x, y)$  is “one step behind”  $t(x, y)$

$$i \geq 0 : \quad t(x, y) \in \mathbf{T}_P^{+i}(\mathbf{I}) \Leftrightarrow dist(x, y) \leq i - 1,$$

$$t1(x, y) \in \mathbf{T}_P^{+i}(\mathbf{I}) \Leftrightarrow dist(x, y) \leq i - 2$$

## Inflationary vs Stratified Semantics

- Inflationary Semantics is well-defined for *all* datalog<sup>¬</sup> programs, not only for stratified programs. (It was used e.g. in the FLORID system.)
- For semi-positive programs, inflationary and stratified semantics coincide.
- Datalog<sup>¬</sup> queries under stratified semantics are subsumed by inflationary semantics:

**Theorem.** For every stratified datalog<sup>¬</sup> program  $P$  with “output” relation  $R$ , there exists a datalog<sup>¬</sup> program  $P'$  such that  $edb(P') = edb(P)$  and for all  $\mathbf{I} \in inst(edb(P))$ ,  $P'_{inf}(\mathbf{I})(R) = P_{strat}(\mathbf{I})(R)$ .

- The converse fails, i.e., there are datalog<sup>¬</sup> queries  $P$  under inflationary semantics that are not equivalent to any datalog<sup>¬</sup> query under stratified semantics (Kolaitis, 1991).

Intuitive reason: Stratified semantics has a static, fixed number of negation layers, while inflationary semantics allows dynamically many.



## Stable Model Semantics

- **Idea:** Try to construct a (minimal) fixpoint by iteration from input

If the construction succeeds, the result is the semantics.

- **Problem:** Application of rules might be compromised.

Example:

$$P = \{p(a) \leftarrow \neg p(a), \quad q(b) \leftarrow p(a), \quad p(a) \leftarrow q(b)\}$$

$(edb(P))$  is void, thus **I** is immaterial and omitted)

- $\mathbf{T}_P$  has the least fixpoint  $\{p(a), q(b)\}$
- It is iteratively constructed  $\mathbf{T}_P^\omega = \{p(a), q(b)\}$
- $p(a)$  is included into  $\mathbf{T}_P^1$  by the first rule, since  $p(a) \notin \mathbf{T}_P^0 = \emptyset$ .
- This compromises the rule application, and  $p(a)$  is not “foundedly” derived!
- Note:  $\mathbf{T}_P^+ = \{p(a), q(b)\}$

## Fixed Evaluation of Negation

- **Reason:**  $\mathbf{T}_P$  is not monotonic.
- **Solution:** Keep negation throughout fixpoint-iteration fixed.  
Evaluate negation w.r.t. a fixed candidate fixpoint model  $\mathbf{J}$ .
- Introduce for datalog<sup>¬</sup> program and  $\mathbf{J} \in inst(sch(P))$  a new immediate consequence operator  $\mathbf{T}_{P,\mathbf{J}}$ :

## Immediate Consequences under Fixed Negation

**Definition.** Given a datalog<sup>¬</sup> program  $P$  and  $\mathbf{J}, \mathbf{K} \in inst(sch(P))$ , a fact  $R(\vec{t})$  is an *immediate* consequence for  $\mathbf{K}$  and  $P$  under negation  $\mathbf{J}$ , if either

- $R \in edb(P)$  and  $R(\vec{t}) \in \mathbf{K}$ , or
- there exists some ground instance  $r$  of a rule in  $P$  such that
  - $H(r) = R(\vec{t})$ ,
  - $B^+(r) \subseteq \mathbf{K}$ , and
  - $B^-(r) \cap \mathbf{J} = \emptyset$ .

(That is, evaluate “ $\neg$ ” under  $\mathbf{J}$  instead of  $\mathbf{K}$ )

**Definition.** For any datalog<sup>¬</sup> program  $P$  and  $\mathbf{J}, \mathbf{K} \in inst(sch(P))$ , let

$$\mathbf{T}_{P,\mathbf{J}}(\mathbf{K}) = \{A \mid A \text{ is an immediate consequence for } \mathbf{K} \text{ and } P \text{ under negation } \mathbf{J}\}$$

Notice:

- $\mathbf{T}_P(\mathbf{K})$  coincides with  $\mathbf{T}_{P,\mathbf{K}}(\mathbf{K})$
- $\mathbf{T}_{P,\mathbf{J}}$  is a monotonic operator, hence has for each  $\mathbf{K} \in inst(sch(P))$  a least fixpoint containing  $\mathbf{K}$ , denoted  $lfp(\mathbf{T}_{P,\mathbf{J}}(\mathbf{K}))$
- $lfp(\mathbf{T}_{P,\mathbf{J}}(\mathbf{I}))$  coincides with  $\mathbf{I}$  on  $edb(P)$  and is the limit  $\mathbf{T}_{P,\mathbf{J}}^\omega$  of the sequence

$$\{\mathbf{T}_{P,\mathbf{J}}^i(\mathbf{I})\}_{i \geq 0}$$

where  $\mathbf{T}_{P,\mathbf{J}}^0(\mathbf{I}) = \mathbf{I}$  and  $\mathbf{T}_{P,\mathbf{J}}^{i+1}(\mathbf{I}) = \mathbf{T}_{P,\mathbf{J}}(\mathbf{T}_{P,\mathbf{J}}^i(\mathbf{I}))$ .

## Stable Models

Using  $\mathbf{T}_{P,\mathbf{J}}$ , stable models are defined by requiring that  $\mathbf{J}$  is reproduced by the program:

**Definition.** Let  $P$  be a datalog<sup>-</sup> program  $P$  and  $\mathbf{I} \in inst(edb(P))$ . Then, a stable model for  $P$  and  $\mathbf{I}$  is any  $\mathbf{J} \in inst(sch(P))$  such that

1.  $\mathbf{J}|_{edb(P)} = \mathbf{I}$ , and
2.  $\mathbf{J} = lfp(\mathbf{T}_{P,\mathbf{J}}(\mathbf{I}))$ .

Notice: Monotonicity of  $\mathbf{T}_{P,\mathbf{J}}$  ensures that at no point in the construction of  $lfp(\mathbf{T}_{P,\mathbf{J}}(\mathbf{I}))$  using fixpoint iteration from  $\mathbf{I}$ , the application of a rule can be compromised later.

**Example**

$$P = \{ p(a) \leftarrow \neg p(a), \quad q(b) \leftarrow p(a), \quad p(a) \leftarrow q(b) \}$$

( $edb(P)$  is void, thus  $\mathbf{I}$  is immaterial and omitted)

- Take  $\mathbf{J} = \{p(a), q(b)\}$ . Then
  - $\mathbf{T}_{P,\mathbf{J}}^0 = \emptyset$
  - $\mathbf{T}_{P,\mathbf{J}}^1 = \emptyset$
- Thus  $lfp(\mathbf{T}_{P,\mathbf{J}}) = \emptyset \neq \mathbf{J}$ .
- Hence, the fixpoint  $\mathbf{J}$  of  $\mathbf{T}_P$  is refuted.
- For  $P$ , no stable model exists; thus, it may be regarded as “inconsistent”.

## Nondeterminism

- **Problem:** A datalog program may have multiple stable models:

$$P = \left\{ \begin{array}{l} \textit{single}(X) \leftarrow \textit{man}(X), \neg \textit{husband}(X) \\ \textit{husband}(X) \leftarrow \textit{man}(X), \neg \textit{single}(X) \end{array} \right\}$$

$$\mathbf{I} = \{\textit{man}(\textit{dilbert})\}$$

- $\mathbf{J}_1 = \{\textit{man}(\textit{dilbert}), \textit{single}(\textit{dilbert})\}$  is a stable model:
  - $\mathbf{T}_{P, \mathbf{J}_1}^0(\mathbf{I}) = \{\textit{man}(\textit{dilbert})\}$
  - $\mathbf{T}_{P, \mathbf{J}_1}^1(\mathbf{I}) = \{\textit{man}(\textit{dilbert}), \textit{single}(\textit{dilbert})\}$  (apply 1st rule)
  - $\mathbf{T}_{P, \mathbf{J}_1}^2(\mathbf{I}) = \{\textit{man}(\textit{dilbert}), \textit{single}(\textit{dilbert})\} = \mathbf{T}_{P, \mathbf{J}_1}^\omega(\mathbf{I})$
- Similarly,  $\mathbf{J}_1 = \{\textit{man}(\textit{dilbert}), \textit{husband}(\textit{dilbert})\}$  is a stable model (symmetry)

## Stable Model Semantics – Definition

- **Solution:** Define stable semantics of  $P$  as the intersection of all stable models (*certain semantics*):

For a datalog<sup>¬</sup> program  $P$  and  $\mathbf{I} \in inst(edb(P))$ ,

denote by  $SM(P, \mathbf{I})$  the set of all stable models for  $\mathbf{I}$  and  $P$ .

**Definition.** The stable model semantics of a datalog<sup>¬</sup> program  $P$  for  $\mathbf{I} \in inst(edb(P))$ , denoted  $P_{sm}(\mathbf{I})$ , is given by

$$P_{sm}(\mathbf{I}) = \begin{cases} \bigcap SM(P, \mathbf{I}), & \text{if } SM(P, \mathbf{I}) \neq \emptyset, \\ \mathbf{B}(P, \mathbf{I}), & \text{otherwise.} \end{cases}$$



## Examples

- 

$$P = \left\{ \begin{array}{l} \textit{single}(X) \leftarrow \textit{man}(X), \neg \textit{husband}(X) \\ \textit{husband}(X) \leftarrow \textit{man}(X), \neg \textit{single}(X) \end{array} \right\}$$

$$P_{sm}(\{\textit{man}(\textit{dilbert})\}) = \{\textit{man}(\textit{dilbert})\}$$

- 

$$P = \{p(a) \leftarrow \neg p(a), \quad q(b) \leftarrow p(a), \quad p(a) \leftarrow q(b)\}$$

$$P_{sm}(\emptyset) = \{p(a), p(b), q(a), q(b)\} = \mathbf{B}(P, \mathbf{I}).$$

## Some Properties

- **Proposition.** Each  $\mathbf{K} \in SM(P, \mathbf{I})$  is a minimal model of  $P$  such that  $\mathbf{K}|_{edb(P)} = \mathbf{I}$ .
- **Proposition.** Each  $\mathbf{K} \in SM(P, \mathbf{I})$  is a minimal fixpoint of  $\mathbf{T}_P$  such that  $\mathbf{K}|_{edb(P)} = \mathbf{I}$ .
- **Theorem.** If  $P$  is a stratified program, then for every  $\mathbf{I} \in edb(P)$ ,  $P_{sm}(\mathbf{I}) = P_{strat}(\mathbf{I})$ .  
Thus, stable model semantics extends stratified semantics to a larger class of programs
- Evaluation of stable semantics is intractable: Deciding whether  $R(\vec{c}) \in P_{sm}(\mathbf{I})$  for given  $R(\vec{c})$  and  $\mathbf{I}$  (while  $P$  is fixed) is coNP-complete.

## Well-Founded Semantics

- **Principle:** Use three truth values: Some facts are true, some false, all others are *unknown*.
- **Intuition:**
  - Positive literals must be derived by applying rules whose body is true
  - Conclude that a negated atom  $\neg A$  is true, if  $A$  can not be derived by assuming that all facts which are not true are false.

## Bibliography

- [1] S. Abiteboul, R. Hull, and V. Vianu. *Foundations of Databases*. Addison-Wesley, 1995.
- [2] K.R. Apt, H.A. Blair, A. Walker, Towards a Theory of Declarative Knowledge, in *Foundations of Deductive Databases and Logic Programming*, J. Minker (ed), pp. 89–148, Morgan Kaufmann, 1988.
- [3] H. Garcia-Molina, J. D. Ullman, and J. Widom. *Database Systems – The Complete Book*. Prentice Hall, 2002.
- [4] DLV homepage, since 1996. <http://www.dbai.tuwien.ac.at/proj/dlv/>.
- [5] M. Gelfond and V. Lifschitz. The Stable Model Semantics for Logic Programming. In *Logic Programming: Proc. Fifth Intl Conference and Symposium*, pp. 1070–1080, 1988. MIT Press.
- [6] M. Gelfond and V. Lifschitz. Classical Negation in Logic Programs and Disjunctive Databases. *New Generation Computing*, 9:365–385, 1991.
- [7] N. Leone, G. Pfeifer, W. Faber, T. Eiter, G. Gottlob, S. Perri, and F. Scarcello. The DLV System for Knowledge Representation and Reasoning. To appear in *ACM Transaction on Computational Logic*. Available at <http://www.arxiv.org/ps/cs.AI/0211004>.
- [8] A. van Gelder, K.A. Ross, J.S. Schlipf, The Well-Founded Semantics for General Logic Programs, *Journal of the ACM*, 38(3):620–650, 1991.