

Shape and Content *

Incorporating Domain Knowledge into Shape Analysis

D. Calvanese¹, T. Kotek², M. Šimkus², H. Veith², and F. Zuleger²

¹ Free University of Bozen-Bolzano

² Vienna University of Technology

Abstract. The verification community has studied dynamic data structures primarily in a bottom-up way by analyzing pointers and the shapes induced by them. Recent work in fields such as separation logic has made significant progress in extracting shapes from program source code. Many real world programs however manipulate complex data whose structure and content is most naturally described by formalisms from object oriented programming and databases. In this paper, we look at the verification of programs with dynamic data structures from the perspective of content representation. Our approach is based on description logic, a widely used knowledge representation paradigm which gives a logical underpinning for diverse modeling frameworks such as UML and ER. Technically, we assume that we have separation logic shape invariants obtained from a shape analysis tool, and requirements on the program data in terms of description logic. We show that the two-variable fragment of first order logic with counting and trees can be used as a joint framework to embed suitable fragments of description logic and separation logic.

1 Introduction

The manipulation and storage of complex information in imperative programming languages is often achieved by dynamic data structures. The verification of programs with dynamic data structures, however, is notoriously difficult, and is a highly active area of current research. While much progress has been made recently in analyzing and verifying the *shape* of dynamic data structures, most notably by separation logic (SL) [23,17], the *content* of dynamic data structures has not received the same attention.

In contrast, disciplines as databases, modeling and knowledge representation have developed highly-successful theories for *content representation and verification*. These research communities typically model reality by classes and binary relationships between these classes. For example, the database community uses

* Kotek, Veith and Zuleger were supported by the Austrian National Research Network S11403-N23 (RiSE) of the Austrian Science Fund (FWF) and by the Vienna Science and Technology Fund (WWTF) through grants PROSEED and ICT12-059. Šimkus was supported by the FWF grant P25518 and the WWTF grant ICT12-15

entity-relationship (ER) diagrams, and *UML* diagrams have been studied in requirements engineering. Content representation in the form of UML and ER has become a central pillar of *industrial software engineering*. In complex software projects, the source code is usually accompanied by *design documents* which provide extensive documentation and models of data structure content. This documentation is both an opportunity and a challenge for program verification. Recent hardware verification papers have demonstrated how design diagrams can be integrated into an industrial verification workflow [18].

In this paper, we propose the use of *Description Logics* (DLs) for the formulation of content specifications. DLs are a well established and highly popular family of logics for representing knowledge in artificial intelligence [3]. In particular, DLs allow to precisely model and reason about UML and ER diagrams [6,2]. DLs are mature and well understood, they have good algorithmic properties and have efficient reasoners. DLs are very readable and form a natural base for developing specification languages. For example, they are the logical backbone of the Web Ontology Language (OWL) for the Semantic Web [21]. DLs vary in expressivity and complexity, and are usually selected according to the expressivity needed to formalize the given target domain.

Unfortunately, the existing content representation technology cannot be applied directly for the verification of content specifications of pointer-manipulating programs. This is due to the strict separation between high-level content descriptions such as UML/ER and the way data is actually stored. For example, query languages such as SQL and Datalog provide a convenient abstraction layer for formulating data queries while ignoring how the database is stored on the disk. In contrast, programs with dynamic data structures manipulate their data structures directly. Moreover, database schemes are usually static while a program may change the content of its data structures over time.


The main goal of this paper is to develop a verification methodology that allows to employ DLs for formulating and verifying content specifications of pointer-manipulating programs. We propose a two-step Hoare-style verification methodology: First, existing shape-analysis techniques are used to derive shape invariants. Second, the user strengthens the derived shape invariants with content annotations; the resulting verification conditions are then checked automatically. Technically, we employ a very expressive DL (henceforth called \mathcal{L}), based on the so called $\mathcal{ALCHOITF}$, which we specifically tailor to better support reasoning about complex pointer structures. For shape analysis we rely on the SL fragment from [7]. In order to reason automatically about the verification conditions involving DL as well as SL formulae, we identify a powerful decidable logic CT^2 which incorporates both logics [10]. We believe that our main contribution is conceptual, integrating these different formalisms for the first time. While the current approach is semi-manual, our long term goal is to increase the automatization of the method.

Overview and Contributions:

- In Section 2, we introduce our formalism. In particular, we formally define *memory structures* for representing the heap and we study the DL \mathcal{L} as a formalism for expressing *content properties* of memory structures.
- In Section 2, we further present the building blocks for our verification methodology: We give an embedding of \mathcal{L} and an embedding of a fragment of the SL from [7] into CT^2 (Lemmata 2 and 3). Moreover, we give a complexity-preserving reduction of satisfiability of CT^2 over memory structures to finite satisfiability of CT^2 (Lemma 1).
- In Section 3, we describe a program model for sequential imperative heap-manipulating programs without procedures. Our main contribution is a Hoare-style proof system for verifying content properties on top of (already verified) shape properties stated in SL.
- Our main technical result is a precise backward-translation of content properties along loop-less code (Lemma 5). This backward-translation allows us to reduce the inductiveness of the Hoare-annotations to satisfiability in CT^2 . Theorem 1 states the soundness and completeness of this reduction.

1.1 Running Example: Information System of a Company

Our running example will be a simple information system for a company with the following UML diagram. The UML gives the relationships between entities in the information system, but says nothing regarding the implementations of the data structures that hold the data. We focus mostly on projects, and on the employees and managers which work on them. Here is an informal description of the programmers' intention. The employees and projects are stored in two lists, both using the *next* pointer. The heads of the two lists are pHd and eHd respectively. Here are some properties of our information system. (i)-(iii) extends the UML somewhat. (iv)-(vi) do not appear in the UML, but can be expressed in DL:

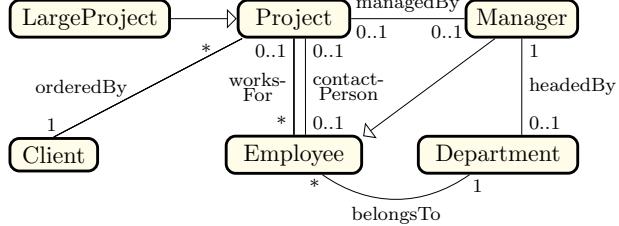

information system, but says nothing regarding the implementations of the data structures that hold the data. We focus mostly on projects, and on the employees and managers which work on them. Here is an informal description of the programmers' intention. The employees and projects are stored in two lists, both using the *next* pointer. The heads of the two lists are pHd and eHd respectively. Here are some properties of our information system. (i)-(iii) extends the UML somewhat. (iv)-(vi) do not appear in the UML, but can be expressed in DL:

- Each employee in the list of employees has a pointer *wrkFor* to a project on the list of projects, indicating the project that the employee is working on (or to null, in case no project is assigned to that employee).
- Each project in the list has a pointer *mngBy* to the employee list, indicating the manager of the project (or to null, if the project doesn't have one).
- Employees have a Boolean field *isMngr* marking them as managers, and only they can manage projects.
- The manager of a project works for the project.
- At least 10 employees work on each large project.
- The contact person for a large-scale project is a manager.

We will refer to these properties as the *system invariants*.

The programmer has written a program S (stated below) for verification. The programmer has the following intuition about her program: The code S adds a new project $proj$ to the project list, and assigns to it all employees in the employee list which are not assigned to any project.

The programmer wants to verify that the system invariants are true after the execution of S , if they were true in the beginning (1). Note that *during* the execution of the code, they might not be true! Additionally the programmer wants to verify that after executing S , the project list has been extended by $proj$, the employee list still contains the same employees and indeed all employees who did not work for a project before now work for project $proj$ (2). We will formally prove the correctness of S following our verification methodology discussed in the introduction. In Section 2.3 we describe how our DL can be used for specifying the verification goals (1) and (2). In Section 3.4 we state verification conditions that allow to conclude the correctness of (1) and (2) for S .

2 Logics for Invariant Specification

2.1 Memory Structures

We use ordinary first order structures to represent memory in a precise way. A *structure* (or, *interpretation*) is a tuple $\mathcal{M} = (M, \tau, \cdot)$, where (i) M is an infinite set (the *universe*), (ii) τ is a set of *constants* and *relation symbols* with an associated non-negative arity, and (iii) \cdot is an *interpretation function*, which assigns to each constant $c \in \tau$ an element $c^{\mathcal{M}} \in M$, and to each n -ary relation symbol $R \in \tau$ an n -ary relation $R^{\mathcal{M}}$ over M . Each relation is either unary or binary (i.e. $n \in \{1, 2\}$). Given $A \subseteq M$, a binary $R^{\mathcal{M}}$, $R^{\mathcal{M}}$ and $e \in A^{\mathcal{M}}$, we may use the notation $R^{\mathcal{M}}(e)$ if $R^{\mathcal{M}}$ is known to be a function over $A^{\mathcal{M}}$.

A *Memory structure* describes a snapshot of the heap and the local variables. We assume sets $\tau_{\text{var}} \subseteq \tau$ of constants $\tau_{\text{fields}} \subseteq \tau$ of binary relation symbols. We will later employ these symbols for variables and fields in programs. A *memory structure* is a structure $\mathcal{M} = (M, \tau, \cdot)$ that satisfies the following conditions:

- (1) τ includes the constants o_{null} , $o_{\mathbf{T}}$, $o_{\mathbf{F}}$.
- (2) τ has the unary relations *Addresses*, *Alloc*, *PossibleTargets*, *MemPool*, and *Aux*.
- (3) $\text{Aux}^{\mathcal{M}} = \{o_{\text{null}}^{\mathcal{M}}, o_{\mathbf{T}}^{\mathcal{M}}, o_{\mathbf{F}}^{\mathcal{M}}\}$ and $|\text{Aux}^{\mathcal{M}}| = 3$.
- (4) $\text{Addresses}^{\mathcal{M}} \cap \text{Aux}^{\mathcal{M}} = \emptyset$ and $\text{Addresses}^{\mathcal{M}} \cup \text{Aux}^{\mathcal{M}} = M$.
- (5) $\text{Alloc}^{\mathcal{M}}$, $\text{PossibleTargets}^{\mathcal{M}}$ and $\text{MemPool}^{\mathcal{M}}$ form a partition of $\text{Addresses}^{\mathcal{M}}$.
- (6) $c^{\mathcal{M}} \in M \setminus \text{MemPool}^{\mathcal{M}}$ for every constant c of τ .
- (7) For all $f \in \tau_{\text{fields}}$, $f^{\mathcal{M}}$ is a function from $\text{Addresses}^{\mathcal{M}}$ to $M \setminus \text{MemPool}^{\mathcal{M}}$.
- (8) If $e \in \text{MemPool}^{\mathcal{M}}$, then $f^{\mathcal{M}}(e) \in \{o_{\text{null}}^{\mathcal{M}}, o_{\mathbf{F}}^{\mathcal{M}}\}$.

- (9) $R^{\mathcal{M}} \subseteq (M \setminus \text{MemPool}^{\mathcal{M}})^n$ for every³ n -ary $R \in \tau \setminus (\{\text{MemPool}\} \cup \tau_{\text{fields}})$.
- (10) $\text{Alloc}^{\mathcal{M}}$ and $\text{PossibleTargets}^{\mathcal{M}}$ are finite. $\text{MemPool}^{\mathcal{M}}$ is infinite.

We explain the intuition behind memory structures. Variables in programs will either have a Boolean value or be pointers. Thus, to represent null and the Boolean values **T** and **F**, we employ the auxiliary relation $\text{Aux}^{\mathcal{M}}$ storing 3 elements corresponding to the 3 values. $\text{Addresses}^{\mathcal{M}}$ represents the memory cells. The relation $\text{Alloc}^{\mathcal{M}}$ is the set of allocated cells, $\text{PossibleTargets}^{\mathcal{M}}$ contains all cells which are not allocated, but are pointed to by allocated cells (for technical reasons it possibly contains some other unallocated cells). $\text{MemPool}^{\mathcal{M}}$ contains the cells which are not allocated, do not have any field values other than null and **F**, are not pointed to by any field, do not participate in any other relation and do not interpret any constant (see (6-9)). The memory cells in MemPool are the candidates for allocation during the run of a program. Since the allocated memory should be finite at any point of the execution of a program, we require that $\text{Alloc}^{\mathcal{M}}$ and $\text{PossibleTargets}^{\mathcal{M}}$ are finite (see (10)), while the available memory $\text{Addresses}^{\mathcal{M}}$ and the memory pool $\text{MemPool}^{\mathcal{M}}$ are infinite. Finally, each cell is seen as a record with the fields of τ_{fields} .

2.2 The Description Logic \mathcal{L}

\mathcal{L} is defined w.r.t. a vocabulary τ consisting of relation and constant symbols.⁴

Definition 1 (Syntax of \mathcal{L}). *The sets of roles and concepts of \mathcal{L} is defined inductively: (1) every unary relation symbol is a concept (atomic concept); (2) every constant symbol is a concept; (3) every binary relation symbol is a role (atomic role); (4) if r, s are roles, then $r \sqcup s$, $r \sqcap s$, $r \setminus s$ and r^- are roles; (5) if C, D are concepts, then so are $C \sqcap D$, $C \sqcup D$, and $\neg C$; (6) if r is a role and C is a concept, then $\exists r.C$ is also a concept; (7) if C, D are concepts, then $C \times D$ is a role (product role).*

The set of formulae of \mathcal{L} is the closure under $\wedge, \vee, \neg, \rightarrow$ of the atomic formulae: $C \sqsubseteq D$ (concept inclusion), where C, D are concepts; $r \sqsubseteq s$ (role inclusion), where r, s are roles; and $\text{func}(r)$ (functionality assertion), where r is a role.

Definition 2 (Semantics of \mathcal{L}). *The semantics is given in terms of structures $\mathcal{M} = (M, \tau, \cdot)$. The extension of $\cdot^{\mathcal{M}}$ from the atomic relations and constants in \mathcal{M} and the satisfaction relation \models are given below. If $\mathcal{M} \models \varphi$, then \mathcal{M} is a*

³ Here $n \in \{1, 2\}$.

⁴ In DL terms, \mathcal{L} corresponds to Boolean \mathcal{ALCHOF} knowledge bases with the additional support for role intersection, role union, role difference and product roles.

model of φ . We write $\psi \models \varphi$ if every model of ψ is also a model of φ .

$$\begin{array}{llll}
(C \sqcap D)^\mathcal{M} &= C^\mathcal{M} \cap D^\mathcal{M} & (r \sqcap s)^\mathcal{M} &= r^\mathcal{M} \cap s^\mathcal{M} \\
(C \sqcup D)^\mathcal{M} &= C^\mathcal{M} \cup D^\mathcal{M} & (r \sqcup s)^\mathcal{M} &= r^\mathcal{M} \cup s^\mathcal{M} \\
(\neg C)^\mathcal{M} &= M \setminus C^\mathcal{M} & (r \setminus s)^\mathcal{M} &= r^\mathcal{M} \setminus s^\mathcal{M} \\
(C \times D)^\mathcal{M} &= C^\mathcal{M} \times D^\mathcal{M} & (r^-)^\mathcal{M} &= \{(e, e') \mid (e', e) \in r^\mathcal{M}\} \\
(\exists r.C)^\mathcal{M} &= \{e \mid \exists e' : (e, e') \in r^\mathcal{M}\} & & \\
\mathcal{M} \models C \sqsubseteq D \text{ if } C^\mathcal{M} \subseteq D^\mathcal{M} & & \mathcal{M} \models r \sqsubseteq s \text{ if } r^\mathcal{M} \subseteq s^\mathcal{M} & \\
\mathcal{M} \models \text{func}(r) \text{ if } \{(e, e_1), (e, e_2)\} \subseteq r^\mathcal{M} \text{ implies } e_1 = e_2 & & &
\end{array}$$

The closure of \models under $\wedge, \vee, \neg, \rightarrow$ is defined in the natural way. We abbreviate: $\top = C \sqcup \neg C$, where C is an arbitrary atomic concept and $\perp = \neg \top$; $\alpha \equiv \beta$ for the formula $\alpha \sqsubseteq \beta \wedge \beta \sqsubseteq \alpha$; and $\exists r$ for the concept $\exists r. \top$; (o, o') for the role $o \times o'$. Note that $\top^\mathcal{M} = M$ and $\perp^\mathcal{M} = \emptyset$ for any structure $\mathcal{M} = (M, \tau, \cdot)$.

2.3 Running Example: Content Invariants in \mathcal{L}

Now we make the example from Section 1.1 more precise. The concepts $ELst$ and $PLst$ are interpreted as the sets of elements in the employee list resp. the project list. $mngBy$, $isMngr$ and $wrkFor$ are roles. o_{eHd} and o_{pHd} are the constants which correspond to the heads of the two lists. The invariants of the systems are:

The employee and project lists are allocated:	$PLst \sqcup ELst \sqsubseteq Alloc$
Projects and employees are distinct:	$PLst \sqcap ELst \sqsubseteq \perp$
$wrkFor$ is set to null for projects:	$PLst \sqsubseteq \exists wrkFor.o_{\text{null}}$
$mngBy$ is set to null for employees:	$ELst \sqsubseteq \exists mngBy.o_{\text{null}}$
$wrkFor$ of employees in the list point to projects in the list or to null:	$\exists wrkFor^-.ELst \sqsubseteq PLst \sqcup o_{\text{null}}$
$isMngr$ is a Boolean field:	$\exists isMngr^-.ELst \sqsubseteq Boolean$
$mngBy$ of projects point to managers or null:	$\exists mngBy^-.PLst \sqsubseteq (ELst \sqcap \exists isMngr.o_{\mathbf{T}}) \sqcup o_{\text{null}}$
The manager of a project must work for the project:	$mngBy \cap (\top \times ELst) \sqsubseteq wrkFor^-$

Let the conjunction of the invariants be given by $\varphi_{invariants}$.

Consider S from Section 1. The states of the heap before and after the execution of S can be related by the following \mathcal{L} formulae. $\varphi_{lists-updt}$ and $\varphi_{p-assgn}$. $\varphi_{lists-updt}$ states that the employee list at the end of the program ($ELst$) is equal to the employee list at the beginning of the program ($ELst_{gho}$), and that the project list at the end of the program ($PLst$) is the same as the project list at the beginning of the program ($PLst_{gho}$), except that $PLst$ also contains the new project o_{proj} . $ELst_{gho}$ and $wrkFor_{gho}$ are *ghost relation symbols*, whose interpretations hold the corresponding values at the beginning of S .

$$\begin{aligned}
\varphi_{lists-updt} &= ELst_{gho} \equiv ELst \wedge PLst_{gho} \sqcup o_{proj} \equiv PLst \\
\varphi_{p-assgn} &= ELst_{gho} \sqcap \exists wrkFor_{gho}.o_{\text{null}} \equiv ELst \sqcap \exists wrkFor.o_{proj}
\end{aligned}$$

Ghost symbols As discussed in Section 2.3, in order to allow invariants of the form $\varphi_{lists-updt} = ELst_{gho} \equiv ELst \wedge PLst_{gho} \sqcup o_{proj} \equiv PLst$ we need ghost symbols. We assume τ contains, for every symbol e.g. $s \in \tau$, the symbol s_{gho} . Therefore, memory structures actually contain *two* snapshots of the memory: one is the *current* snapshot, on which the program operates, and the other is a *ghost* snapshot, which is a snapshot of the memory at the beginning of the program, and which the program does not change or interact with. We denote the two underlying memory structures of \mathcal{M} by \mathcal{M}_{cur} and \mathcal{M}_{gho} . Since the interpretations of ghost symbols should not change throughout the run of a program, they will sometime require special treatment.

2.4 The Separation Logic Fragment **SL_{ls}**

The SL that we use is denoted **SL_{ls}**, and is the logic from [7] with lists and multiple pointer fields, but without trees. It can express that the heap is partitioned into lists and individual cells. For example, to express that the heap contains only the two lists $ELst$ and $PLst$ we can write the **SL_{ls}** formula $ls(pHd, \text{null}) * ls(eHd, \text{null})$.

We denote by $var_i \in Var$ and $f_i \in Fields$ the sets of variables respectively fields to be used in **SL_{ls}**-formulae. var_i are constant symbols. f_i are binary relation symbols always interpreted as functions. An **SL_{ls}**-formula $\Pi \vdash \Sigma$ is the conjunction of a *pure part* Π and a *spatial part* Σ . Π is a conjunction of equalities and inequalities of variables and o_{null} . Σ is a *spatial conjunction* $\Sigma = \beta_1 * \dots * \beta_r$ of formulae of the form $ls(E_1, E_2)$ and $var \mapsto [f_1 : E_1, \dots, f_k : E_k]$, where each E_i is a variable or o_{null} . Additionally, Σ can be *emp* and Π can be **T**. When $\Pi = \mathbf{T}$ we write $\Pi \vdash \Sigma$ simply as Σ .

The memory model of [7] is very similar to ours. We give the semantics of **SL_{ls}** in memory structures directly due to space constraints. See the appendix for a discussion of the standard semantics of **SL_{ls}**. Π is interpreted in the natural way. Σ indicates that $Alloc^{\mathcal{M}}$ is the disjoint union of r parts $P_1^{\mathcal{M}}, \dots, P_r^{\mathcal{M}}$. If β_i is of the form $var \mapsto [f_1 : E_1, \dots, f_k : E_k]$ then $|P_i^{\mathcal{M}}| = 1$ and, denoting $v \in P_i^{\mathcal{M}}$, $f_j^{\mathcal{M}}(v) = E_j^{\mathcal{M}}$. If β_i is of the form $ls(E_1, E_2)$, then $|P_i^{\mathcal{M}}|$ is a list from $E_1^{\mathcal{M}}$ to $E_2^{\mathcal{M}}$. $E_2^{\mathcal{M}}$ might not belong to $P_i^{\mathcal{M}}$. If $\Sigma = \text{emp}$ then $Alloc^{\mathcal{M}} = \emptyset$.

2.5 The Two-variable Fragment with Counting and Trees **CT²**

C^2 is the subset of first-order logic whose formulae contain at most two variables, extended with counting quantifiers $\exists^{\leq k}$, $\exists^{\geq k}$ and $\exists^{=k}$ for all $k \in \mathbb{N}$. W. Charatonik and P. Witkowsk [10] recently studied an extension of C^2 which contains both our DL and our SL. CT^2 is the subset of second-order logic of the form $\exists F_1 \varphi(F_1) \wedge \varphi_{\text{forest}}(F_1)$ where $\varphi \in C^2$ and $\varphi_{\text{forest}}(F_1)$ says that F_1 is a forest. Note that CT^2 is not closed under negation, conjunction or disjunction. However, CT^2 is closed under conjunction or disjunction with C^2 -formulae.

A CT^2 -formula φ is *satisfiable in a memory structure* if there is a memory structure \mathcal{M} such that $\mathcal{M} \models \varphi$. We write $\psi \models_m \varphi$ if $\mathcal{M} \models \psi$ implies $\mathcal{M} \models \varphi$ for

every memory structure \mathcal{M} . Lemma 1 states the crucial property of CT^2 that we use. It follows from [10], by reducing the memory structures to closely related finite structures.⁵ (see Appendix B).

Lemma 1. *Satisfiability of CT^2 by memory structures is in NEXPTIME.*

2.6 Embedding \mathcal{L} and $\mathbf{SL}_{\mathbf{ls}}$ in CT^2

\mathcal{L} has a fairly standard reduction (see e.g. [8]) to \mathcal{C}^2 :

Lemma 2. *For every vocabulary, there exists $tr : \mathcal{L}(\tau) \rightarrow \mathcal{C}^2(\tau)$ such that for every $\varphi \in \mathcal{L}(\tau)$, φ and $tr(\varphi)$ agree on the truth value of all τ -structures.*

E.g., $tr(C_1 \sqsubseteq C_2) = \forall x C_1(x) \rightarrow C_2(x)$. The details of tr are given in Table 1.

The translation of $\mathbf{SL}_{\mathbf{ls}}$ requires more work. Later we need the following related translations: $\alpha : \mathbf{SL}_{\mathbf{ls}} \rightarrow \mathcal{L}$ extracts from the $\mathbf{SL}_{\mathbf{ls}}$ properties whatever can be expressed in \mathcal{L} . $\beta : \mathbf{SL}_{\mathbf{ls}} \rightarrow CT^2$ captures $\mathbf{SL}_{\mathbf{ls}}$ precisely.

Given a structure \mathcal{M} , $L^{\mathcal{M}}$ is a *singly linked list* from $o_{var_1}^{\mathcal{M}}$ to $o_{var_2}^{\mathcal{M}}$ w.r.t. the field $next^{\mathcal{M}}$ if \mathcal{M} satisfies the following five conditions, or it is empty. Except for (5), the conditions are expressed fully in \mathcal{L} below:

(1) $o_{var_1}^{\mathcal{M}}$ belongs to $L^{\mathcal{M}}$; (2) $o_{var_2}^{\mathcal{M}}$ is pointed to by an $L^{\mathcal{M}}$ element; (3) $o_{var_2}^{\mathcal{M}}$ does not belong to $L^{\mathcal{M}}$; (4) Every $L^{\mathcal{M}}$ element is pointed to from an $L^{\mathcal{M}}$ element, except possibly for $o_{var_1}^{\mathcal{M}}$; (5) all elements of $L^{\mathcal{M}}$ are reachable from $o_{var_1}^{\mathcal{M}}$ via $next^{\mathcal{M}}$. Let

$$\begin{aligned} \alpha^1(\mathbf{ls}) &= (o_{var_1} \sqsubseteq L) & \alpha^3(\mathbf{ls}) &= (o_{var_2} \sqsubseteq \neg L) \\ \alpha^2(\mathbf{ls}) &= (o_{var_2} \sqsubseteq \exists next^-.L) & \alpha^4(\mathbf{ls}) &= (L \sqsubseteq o_{var_1} \sqcup \exists next^-.L) \\ \alpha_{emp-ls}(\mathbf{ls}) &= (L \sqsubseteq \perp) \wedge (o_{var_1} = o_{var_2}) \\ \alpha(\mathbf{ls}) &= \alpha^1(\mathbf{ls}) \wedge \cdots \wedge \alpha^4(\mathbf{ls}) \vee \alpha_{emp-ls}(\mathbf{ls}) \end{aligned}$$

In memory structures \mathcal{M} satisfying $\alpha(\mathbf{ls})$, if $L^{\mathcal{M}}$ is not empty, then it contains a list segment from $o_{var_1}^{\mathcal{M}}$ to $o_{var_2}^{\mathcal{M}}$, but additionally $L^{\mathcal{M}}$ may contain additional simple $next^{\mathcal{M}}$ -cycles, which are disjoint from the list segment. Here we use the finiteness of $Alloc^{\mathcal{M}}$ (which contains $L^{\mathcal{M}}$) and the functionality of $next^{\mathcal{M}}$. A connectivity condition is all that is lacking to express \mathbf{ls} precisely. $\alpha(\mathbf{ls})$ can be extended to $\alpha : \mathbf{SL}_{\mathbf{ls}} \rightarrow \mathcal{L}$ in a natural way (see Appendix C) such that:

Lemma 3. *For every $\varphi \in \mathbf{SL}_{\mathbf{ls}}$, φ implies $\alpha(\varphi)$ over memory structures.*

To rule out the superfluous cycles we turn to CT^2 . Let

$$\begin{aligned} \beta^5(\mathbf{ls}) &= \forall x \forall y [(L(x) \wedge L(y)) \rightarrow (F_1(x, y) \leftrightarrow next(x, y))] \wedge \\ &\quad \forall x [(L(x) \wedge \forall y (L(y) \rightarrow \neg F_1(y, x))) \rightarrow (x \approx o_{var_1})] \end{aligned}$$

$\beta^5(\mathbf{ls})$ states that the forest F_1 coincides with $next$ inside L and that the forest induced by F_1 on L is a tree. Let $\beta(\mathbf{ls}) = \exists F_1 tr(\alpha(\mathbf{ls})) \wedge \beta^5(\mathbf{ls}) \wedge \varphi_{forest}(F_1)$. $\beta(\mathbf{ls}) \in CT^2$ and it expresses that $L^{\mathcal{M}}$ is a list. The extension of $\beta(\mathbf{ls})$ to the translation function $\beta : \mathbf{SL}_{\mathbf{ls}} \rightarrow CT^2$ is natural and discussed in Appendix C. Appendix D discusses the translation of *cyclic data structures* under β .

⁵ In fact [10] allows existential quantification over two forests, but will only need one.

Lemma 4. For every $\varphi \in \mathbf{SLIs}$: φ and $\beta(\varphi)$ agree on all memory structures.

CT^2 's flexibility allows to easily express variations of singly-linked lists, such as doubly-linked lists, or lists in which every element points to a special head element via a pointer *head*, and analogue variants of trees.

2.7 Running Example: Shape Invariants

At the loop header of the program S from the introduction, the memory contains two distinct lists, namely $PLst$ and $ELst$. $ELst$ is partitioned into two parts: the employees who have been visited in the loop so far, and those that have not. This can be expressed in \mathbf{SLIs} by the formula: $\varphi_{\ell_t} = \mathbf{T}^! \text{ls}(eHd, e) * \text{ls}(e, \text{nil}) * \text{ls}(pHd, \text{nil})$. The translation $\alpha(\varphi_{\ell_t})$ is given by

$$\begin{aligned} P_1 \sqcup P_2 \sqcup P_3 &\equiv \text{Alloc} \wedge \alpha(\text{ls}(eHd, e, \text{next}, P_1)) \wedge \\ &\quad \alpha(\text{ls}(e, \text{null}, \text{next}, P_2)) \wedge \alpha(\text{ls}(pHd, \text{null}, \text{next}, P_3)) \wedge \\ P_1 \sqcap P_2 &\equiv \perp \wedge P_1 \sqcap P_3 \equiv \perp \wedge P_2 \sqcap P_3 \equiv \perp \wedge \alpha_{\mathbf{T}} \end{aligned}$$

The translation from SL assigns concepts P_i to each of the lists. $\alpha_{\mathbf{T}}$ which occurs in $\alpha(\varphi_{\ell_t})$ is the translation of $\Pi = \mathbf{T}$ in φ_{ℓ_t} . In order to clarify the meaning of $\alpha(\varphi_{\ell_t})$ we relate the P_i to the concept names from Section 2.3 and simplify the formula somewhat. Let $\psi_l = P_1 \sqcup P_2 \equiv ELst \wedge P_3 \equiv PLst$. P_1 contains the elements of $ELst$ visited in the loop so far. $\alpha(\varphi_{\ell_t})$ is equivalent to:

$$\begin{aligned} \alpha'(\varphi_{\ell_t}) &= \psi_l \wedge ELst \sqcup PLst \equiv \text{Alloc} \wedge ELst \sqcap PLst \equiv \perp \wedge \alpha(\text{ls}(eHd, e, \text{next}, P_1)) \\ &\quad \wedge \alpha(\text{ls}(e, \text{null}, \text{next}, ELst \sqcap \neg P_1)) \wedge \alpha(\text{ls}(pHd, \text{null}, \text{next}, PLst)) \\ \beta^5(\Sigma) &= \beta^5(\text{ls}(eHd, e, \text{next}, P_1)) \wedge \beta^5(\text{ls}(e, \text{null}, \text{next}, ELst \sqcap \neg P_1)) \wedge \\ &\quad \beta^5(\text{ls}(pHd, \text{null}, \text{next}, PLst)) \\ \beta(\varphi_{\ell_t}) &= \exists F_1 \text{tr}(\alpha(\varphi) \wedge \beta^5(\Sigma) \wedge \varphi_{\text{forest}}(F_1)) \end{aligned}$$

3 Content Analysis

3.1 Syntax and Semantics of the Programming Language

Loopless Programs are generated by the following syntax:

$$\begin{aligned} e &:: var.f \mid var \mid \text{null} \quad (f \in \tau_{\text{fields}}, o_{var} \in \tau_{\text{var}}) \\ b &:: (e_1 = e_2) \mid \sim b \mid (b_1 \text{ and } b_2) \mid (b_1 \text{ or } b_2) \mid \mathbf{T} \mid \mathbf{F} \\ S &:: var_1 := e_2 \mid var_1.f := e_2 \mid \text{skip} \mid S_1; S_2 \mid var := \text{new} \mid \text{dispose}(var) \mid \\ &\quad \text{if } b \text{ then } S_1 \text{ fi} \mid \text{if } b \text{ then } S_1 \text{ else } S_2 \text{ fi} \mid \text{assume}(b) \end{aligned}$$

Let Exp denote the set of expressions e and $Bool$ denote the set of Boolean expressions b . To define the semantics of pointer and Boolean expressions, we extend f^M by $f^M(\text{err}) = \text{err}$ for every $f \in \tau_{\text{fields}}$. We define $\mathcal{E}_e(M) : Exp \rightarrow Addresses^M \cup \{\text{null}, \text{err}\}$ and $\mathcal{B}_b(M) : Bool \rightarrow \{o_{\mathbf{T}}, o_{\mathbf{F}}, \text{err}\}$ (with $\text{err} \notin M$):

$$\begin{aligned} \mathcal{E}_{var}(M) &= o_{var}^M, \text{ if } o_{var}^M \in \text{Alloc}^M \quad \mathcal{B}_{e_1=e_2}(M) = \text{err} \text{ if } \mathcal{E}_{e_i}(M) = \text{err}, i \in \{1, 2\} \\ \mathcal{E}_{var}(M) &= \text{err}, \text{ if } o_{var}^M \notin \text{Alloc}^M \quad \mathcal{B}_{e_1=e_2}(M) = o_{\mathbf{T}}, \text{ if } \mathcal{E}_{e_1}(M) = \mathcal{E}_{e_2}(M) \\ \mathcal{E}_{ar.f}(M) &= f^M(\mathcal{E}_{var}(M)) \quad \mathcal{B}_{e_1=e_2}(M) = o_{\mathbf{F}}, \text{ if } \mathcal{E}_{e_1}(M) \neq \mathcal{E}_{e_2}(M) \end{aligned}$$

\mathcal{B} extends naturally w.r.t. the Boolean connectives.

The operational semantics of the programming language is: For any command S , if \mathcal{E} or \mathcal{B} give the value err, then $\langle S, \mathcal{M} \rangle \rightsquigarrow \text{abort}$. Otherwise, the semantics is as listed below. First we assume that in the memory structures involved all relation symbols either belong to τ_{fields} , are ghost symbols or are the required symbols of memory structures (Alloc , Aux , etc.).

1. $\langle \text{skip}, \mathcal{M} \rangle \rightsquigarrow \mathcal{M}$.
2. $\langle \text{var}_1 := e_2, \mathcal{M} \rangle \rightsquigarrow [\mathcal{M} \mid o_{\text{var}_1}^{\mathcal{M}} \text{ is set to } \mathcal{E}_{e_2}(\mathcal{M})]$.
3. $\langle \text{var} := \text{new}, \mathcal{M} \rangle \rightsquigarrow [\mathcal{M} \mid \text{For some } t \in \text{MemPool}^{\mathcal{M}}, t \text{ is moved to } \text{Alloc}^{\mathcal{M}} \text{ and } o_{\text{var}}^{\mathcal{M}} \text{ is set to } t]$,
4. If $o_{\text{var}}^{\mathcal{M}} \notin \text{Alloc}^{\mathcal{M}}$, $\langle \text{dispose}(\text{var}), \mathcal{M} \rangle \rightsquigarrow \text{abort}$;
otherwise $\langle \text{dispose}(\text{var}), \mathcal{M} \rangle \rightsquigarrow [\mathcal{M} \mid o_{\text{var}}^{\mathcal{M}} \text{ is removed from } \text{Alloc}^{\mathcal{M}}]$.
5. $\langle S_1; S_2, \mathcal{M} \rangle \rightsquigarrow \langle S_2, \langle S_1, \mathcal{M} \rangle \rangle$
6. $\langle \text{if } b \text{ then } S_{\mathbf{T}} \text{ else } S_{\mathbf{F}}, \mathcal{M} \rangle \rightsquigarrow \langle S_{\text{tv}}, \mathcal{M} \rangle$ where $\text{tv} = \mathcal{B}_b(\mathcal{M})$.
7. $\langle \text{if } b \text{ then } S, \mathcal{M} \rangle \rightsquigarrow \langle \text{if } b \text{ then } S \text{ else skip fi}, \mathcal{M} \rangle$.
8. If $\mathcal{B}_b(\mathcal{M}) = \mathbf{T}$, then $\langle \text{assume}(b), \mathcal{M} \rangle \rightsquigarrow \mathcal{M}$;
otherwise $\langle \text{assume}(b), \mathcal{M} \rangle \rightsquigarrow \text{abort}$.

If \mathcal{M} is a memory structure and $\langle S, \mathcal{M} \rangle \rightsquigarrow \mathcal{M}'$, then \mathcal{M}' is a memory structure.

Now consider a relation symbol e.g. ELst . If $\langle S, \mathcal{M} \rangle \rightsquigarrow \mathcal{M}'$, then we want to think of $\text{ELst}^{\mathcal{M}}$ and $\text{ELst}^{\mathcal{M}'}$ as the employee list before and after the execution of S . However, the constraints that $\text{ELst}^{\mathcal{M}}$ and $\text{ELst}^{\mathcal{M}'}$ are lists and that $\text{ELst}^{\mathcal{M}'}$ is indeed obtained from $\text{ELst}^{\mathcal{M}}$ by running S will be expressed as formulae. In the \rightsquigarrow relation, we allow any values for $\text{ELst}^{\mathcal{M}}$ and $\text{ELst}^{\mathcal{M}'}$.

For any tuple \bar{R} of relation symbols which do not belong to τ_{fields} , are not ghost symbols and are not the required symbols of memory structures (Alloc , Aux , etc.), we extend \rightsquigarrow as follows: if $\langle S, \mathcal{M} \rangle \rightsquigarrow \mathcal{M}'$, then $\langle S, \langle \mathcal{M}, \bar{R}^{\mathcal{M}} \rangle \rangle \rightsquigarrow \langle \mathcal{M}', \bar{R}^{\mathcal{M}'} \rangle$, for any tuples $\bar{R}^{\mathcal{M}}$ and $\bar{R}^{\mathcal{M}'}$.

Programs with Loops are represented as hybrids of the programming language for loopless code and control flow graphs.

Definition 3 (Program). A program is $G = \langle V, E, \ell_{\text{init}}, \text{shp}, \text{cnt}, \lambda \rangle$ such that $G = (V, E)$ is a directed graph with no multiple edge but possibly containing self-loops, $\ell_{\text{init}} \in V$ has in-degree 0, $\text{shp} : V \rightarrow \mathbf{SLLs}$, $\text{cnt} : V \rightarrow \mathcal{L}(\tau)$ are functions, and λ is a function from E to the set of loopless programs.

Here is the code S from the introduction:

$$\begin{array}{ll}
 V = \{\ell_b, \ell_l, \ell_e\} & E = \{(\ell_b, \ell_l), (\ell_l, \ell_l), (\ell_l, \ell_e)\} \\
 \lambda(\ell_b, \ell_l) = S_b & \ell_{\text{init}} = \ell_b \\
 \lambda(\ell_l, \ell_l) = \text{assume}(\sim(e = \text{null})); S_{\ell_l} & \\
 \lambda(\ell_l, \ell_e) = \text{assume}(e = \text{null}); S_e & \begin{array}{c} \ell_b \\ \downarrow S_b \\ \ell \\ \text{---} \\ \ell \\ \text{---} \\ \ell_e \\ \downarrow S_e \end{array} \end{array}$$

S_b , S_{ℓ_l} and S_e denote the three loopless code blocks which are respectively the code block before the loop, inside the loop and after the loop. The annotations shp and cnt are described in Section 3.4.

The semantics of programs derive from the semantics of loopless programs and is given in terms of program paths. Given a program G , a *path* in G is a finite sequence of directed edges e_1, \dots, e_t such that for all $1 \leq i \leq t-1$, the tail of e_i is the head of e_{i+1} . A path may contain cycles.

Definition 4 (\rightsquigarrow^* for paths). *Given a program G , a path P in G , and memory structures \mathcal{M}_1 and \mathcal{M}_2 we define whether $\langle P, \mathcal{M}_1 \rangle \rightsquigarrow^* \mathcal{M}_2$ holds inductively.*

- If P is empty, then $\langle P, \mathcal{M}_1 \rangle \rightsquigarrow^* \mathcal{M}_2$ iff $\mathcal{M}_1 = \mathcal{M}_2$.
- If e_t is the last edge of P , then $\langle P, \mathcal{M}_1 \rangle \rightsquigarrow^* \mathcal{M}_2$ iff there is \mathcal{M}_3 such that $\langle P \setminus \{e_t\}, \mathcal{M}_1 \rangle \rightsquigarrow^* \mathcal{M}_3$ and $\langle \lambda(e_t), \mathcal{M}_1 \rangle \rightsquigarrow^* \mathcal{M}_3$. $P \setminus \{e_t\}$ denotes the path obtained from P by removing the last edge e_t .

3.2 Hoare-style Proof System

Now we are ready to state our two-step verification methodology that we formulated in Section 1 precisely. Our methodology assumes a program P as in Definition 3 as input (ignoring the *shp* and *cnt* functions for the moment).

I. Shape Analysis. The user annotates the program locations with SL formulae from **SLIs** (stored in the *shp* function of P). Then the user proves the validity of the **SLIs** annotations, for example, by using techniques from [7].

II. Content Analysis. The user annotates the program locations with \mathcal{L} -formulae that she wants to verify (stored in the *cnt* function of P). We point out that an annotation $cnt(\ell)$ can use the concepts occurring in $\alpha(shp(\ell))$ (recall that $\alpha : \mathbf{SLIs} \rightarrow \mathcal{L}$ maps SL formulae to \mathcal{L} -formulae).

In the rest of the paper we discuss how to verify the *cnt* annotations. In Section 3.3 we describe how to derive a verification condition for every program edge. The verification conditions rely on the backwards propagation function Θ for \mathcal{L} -formulae which we introduce in Section 3.5. The key point of our methodology is that the validity of the verification conditions can be discharged automatically by a satisfiability solver for CT^2 -formulae. We show that all the verification conditions are valid if and only if *cnt* is inductive. Intuitively, *cnt* being inductive ensures that the annotations *cnt* can be used in an inductive proof to show that all reachable memory structures indeed satisfy the annotations $cnt(\ell)$ at every program location ℓ (see Definition 6 below).

3.3 Content Verification

We want to prove that, for every initial memory structure \mathcal{M}_1 from which the computation satisfies *shp* and which satisfies the content pre-condition $cnt(\ell_{init})$, the computation satisfies *cnt*. Here are the corresponding verification conditions, which annotate the vertices of G :

Definition 5 (Verification conditions). *Given a program G , VC is the function from E to \mathcal{L} given for $e = (\ell_0, \ell)$ by*

$$VC(e) = \neg [\beta(shp(\ell_0)) \wedge tr(cnt(\ell_0)) \wedge tr(\Theta_{\lambda(e)}(\alpha(shp(\ell)) \wedge \neg cnt(\ell)))]$$

VC(e) holds if VC(e) is a tautology over memory structures ($\top \models_m VC(e)$).

Θ is discussed in Section 3.5. As we will see, $VC(\ell_0, \ell)$ expresses that when running the loopless program $\lambda(e)$ when the memory satisfies the the annotations of ℓ_0 , and when the shape annotation of ℓ is at least partly true (i.e., when $\alpha(shp(\ell)))$, the content annotation of ℓ holds.

Let J be a set of memory structures. For a formula in CT^2 or \mathcal{L} , we write $J \models \varphi$ if, for every $\mathcal{M} \in J$, $\mathcal{M} \models \varphi$. Let $Init$ be a set of memory structures.

Definition 6 (Inductive program annotation). Let $f : V \rightarrow CT^2$. We say f is inductive for $Init$ if (i) $Init \models f(\ell_{init})$, and (ii) for every edge $e = (\ell_1, \ell_2) \in E$ and memory structures \mathcal{M}_1 and \mathcal{M}_2 such that $\mathcal{M}_1 \models f(\ell_1)$ and $\langle \lambda(e), \mathcal{M}_1 \rangle \rightsquigarrow \mathcal{M}_2$, we have $\mathcal{M}_2 \models f(\ell_2)$. We say shp is inductive for $Init$ if the composition $shp \circ \beta : V \rightarrow CT^2$ is inductive for $Init$. We say cnt is inductive for $Init$ relative to shp if shp is inductive for $Init$ and $g : V \rightarrow CT^2$ is inductive for $Init$, where $g(\ell) = tr(cnt(\ell)) \wedge \beta(shp(\ell))$.

Theorem 1 (Soundness and Completeness of the Verification Conditions). Let G be a program such that shp is inductive for $Init$ and $Init \models cnt(\ell_{init})$. The following statements are equivalent:

(i) For all $e \in E$, $VC(e)$ holds. (ii) cnt is inductive for $Init$ relative to shp .

We make the notion of a computation satisfying the verification conditions precise using the following definition:

Definition 7 (Reach(ℓ)). Given a program G , a node $\ell \in V$, and a set $Init$ of memory structures, $Reach(\ell)$ is the set of memory structures \mathcal{M} for which there is $\mathcal{M}_{init} \in Init$ and a path P in G starting at ℓ_{init} such that $\langle P, \mathcal{M}_{init} \rangle \rightsquigarrow^* \mathcal{M}$.

In particular, $Reach(\ell_{init}) = Init$. The proof of Theorem 1 and its consequence Theorem 2 below are given in in Appendix F.

Theorem 2 (Soundness of the Verification Methodology). Let G be a program such that shp is inductive for $Init$ and $Init \models cnt(\ell_{init})$. If for all $e \in E$, $VC(e)$ holds, then for $\ell \in V$, $Reach(\ell) \models cnt(\ell)$.

3.4 Running Example: General Methodology

To verify the correctness of the code S , the shp and cnt annotations must be provided. The shape annotations of program S are:

$$\begin{aligned} shp(\ell_b) &= ls(eHd, null) * ls(pHd, null) \\ shp(\ell_l) &= \varphi_{\ell_l} \\ shp(\ell_e) &= (proj = pHd) \dagger ls(eHd, null) * ls(pHd, null) \end{aligned}$$

$\varphi_{\ell_l} = ls(eHd, null) * ls(e, null) * ls(pHd, e)$ was considered in Section 2.7.

The three content annotations require that the system invariants $\varphi_{invariants}$ from Section 2.3 hold. The post-condition additionally requires that $\varphi_{p-assgn}$ and $\varphi_{lists-updts}$ hold. Recall $\varphi_{p-assgn}$ states that every employee which was not

assigned a project, is assigned to o_{proj} . $\varphi_{lists-updt}$ states that the content of the two lists remain unchanged, except that the project o_{proj} is inserted to $PLst$.

In order to interact with the translations $\alpha(shp(\cdot\cdot\cdot))$ of the shape annotations, we need to relate the P_i to the concepts $ELst$ and $PLst$. In Section 2.7 we defined ψ_l , which relates the P_i generated by α on $shp(\ell_l)$.

$$\begin{aligned}\psi_{\ell_b} &= \psi_{\ell_e} = P_1 \equiv ELst \wedge P_2 \equiv PLst \\ \text{cnt}(\ell_b) &= \psi_{\ell_b} \wedge \varphi_{invariants} \\ \text{cnt}(\ell_l) &= \psi_{\ell_l} \wedge \varphi_{invariants} \wedge \varphi_{lists-updt} \wedge \varphi_{p-as-\ell_l} \\ \text{cnt}(\ell_e) &= \psi_{\ell_e} \wedge \varphi_{invariants} \wedge \varphi_{lists-updt} \wedge \varphi_{p-assgn} \\ \varphi_{p-as-\ell_l} &= P_1 \sqcap \exists wrkFor_{gho}.o_{null} \equiv P_1 \sqcap \exists wrkFor.o_{proj}\end{aligned}$$

$\varphi_{p-as-\ell_l}$ states that, in the part of $ELst$ containing the employees visited so far in the loop, any employee which was not assigned to a project at the start of the program (i.e., in the ghost version of $wrkFor$) is assigned to the project $proj$. $\varphi_{p-as-\ell_l}$ makes no demands on elements of $ELst$ which have not been reached in the loop so far. The verification conditions of G are, for each $(\ell_1, \ell_2) \in E$,

$$VC(\ell_1, \ell_2) = \neg[\beta(shp(\ell_1)) \wedge \text{tr}(\text{cnt}(\ell_1)) \wedge \text{tr}(\Theta_{\lambda(\ell_1, \ell_2)}(\alpha(shp(\ell_2)) \wedge \neg \text{cnt}(\ell_2)))]$$

The verification conditions $VC(e)$ express that the loopless programs on the edges e of G satisfy their annotations. To prove the correctness of G w.r.t. $VC(e)$ using Theorem 2, we prove that $VC(e)$, $e \in E$, hold, in order to get:

Conclusion 1 $\text{Reach}(\ell) \models \text{cnt}(\ell)$, for all $\ell \in V$.

3.5 Backwards Propagation and the Running Example

Here we shortly discuss the backwards propagation of a formula along a loopless program S . Let $\langle S, \mathcal{M}_1 \rangle \rightsquigarrow \mathcal{M}_2$ where \mathcal{M}_1 and \mathcal{M}_2 are memory structures over the same vocabulary τ . E.g., in our running example, for $i = 1, 2$, \mathcal{M}_i is

$$\langle M, ELst^{\mathcal{M}_i}, next^{\mathcal{M}_i}, mngBy^{\mathcal{M}_i}, \dots, ELst_{gho}^{\mathcal{M}_i}, next_{gho}^{\mathcal{M}_i}, \dots, Alloc^{\mathcal{M}_i}, Aux^{\mathcal{M}_i}, \dots \rangle$$

We will show how to translate a formula for \mathcal{M}_2 to a formula for an extended \mathcal{M}_1 . Fields and variables in \mathcal{M}_2 will be translated by the backwards propagation into expressions involving elements of \mathcal{M}_1 . For ghost symbols $s_{gho}^{\mathcal{M}_1}$, $s_{gho}^{\mathcal{M}_2}$ will be used instead of $s_{gho}^{\mathcal{M}_2}$ since they do not change during the run of the program. Let $\tau^{rem} \subseteq \tau$ be the set of the remaining symbols, i.e. the symbols of $\tau \setminus (\{PossibleTargets, MemPool\} \cup \tau_{\text{fields}})$ which are not ghost symbols, for example $ELst$, but not $ELst_{gho}$, $next$ or $mngBy$. We need the result of the backwards propagation to refer to the interpretations of symbols in τ^{rem} from \mathcal{M}_2 rather than \mathcal{M}_1 . Therefore, these interpretations are copied as they are from \mathcal{M}_2 and added to \mathcal{M}_1 as follows. For every $R \in \tau^{rem}$, we add a symbol R^{ext} for the copied relation. We denote by $(\bar{R}^{ext})^{\mathcal{M}_1}$ the tuple

$((R^{ext})^{\mathcal{M}_1} : (R^{ext})^{\mathcal{M}_1} = R^{\mathcal{M}_2} \text{ and } R \in \tau^{rem})$ Let τ^{ext} extend τ with R^{ext} for each $R \in \tau^{rem}$. The backwards propagation updates the fields and variables according to the loopless code. Afterwards, we substitute the symbols $R \in \tau^{rem}$ in φ with the corresponding R^{ext} . We present here a somewhat simplified version of the backwards propagation lemma. The precise version is similar in spirit and is given in Appendix E.

Lemma 5 (Simplified). *Let S be a loopless program, let \mathcal{M}_1 and \mathcal{M}_2 be memory structures, and φ be an \mathcal{L} -formula over τ .*

1. *If $\langle S, \mathcal{M}_1 \rangle \rightsquigarrow \mathcal{M}_2$, then: $\mathcal{M}_2 \models \varphi$ iff $\langle \mathcal{M}_1, (\bar{R}^{ext})^{\mathcal{M}_1} \rangle \models \Theta_S(\varphi)$.*
2. *If $\langle S, \mathcal{M}_1 \rangle \rightsquigarrow \text{abort}$, then $\langle \mathcal{M}_1, (\bar{R}^{ext})^{\mathcal{M}_1} \rangle \not\models \Theta_S(\varphi)$.*

As an example of the backwards propagation process, we consider a formula from Section 3.4, which is part of the content annotation of ℓ_l and perform the backwards propagation on the loopless program inside the loop:

$$\varphi_{p-as-\ell_l} = P_1 \sqcap \exists wrkFor_{gho}.o_{null} \equiv P_1 \sqcap \exists wrkFor.o_{proj}$$

Since $next$ does not occur in $\varphi_{p-as-\ell_l}$, backwards propagation of $\varphi_{p-as-\ell_l}$ over $e := e.next$ does not change the formula (however $\alpha(shp(\ell_l))$ by this command). The backwards propagation of the *if* command gives

$$\begin{aligned} \Psi_{S_{\ell_l}}(\varphi_{p-as-\ell_l}) &= (\neg(\exists wrkFor^-.o_e \equiv o_{null}) \wedge \varphi_{p-as-\ell_l}) \vee \\ &\quad \exists wrkFor^-.o_e \equiv o_{null} \wedge \Psi_{e.wrkFor:=proj}(\varphi_{p-as-\ell_l}) \\ \Psi_{e.wrkFor:=proj}(\varphi_{p-as-\ell_l}) &= P_1 \sqcap \exists wrkFor_{gho}.o_{null} \equiv \\ &\quad P_1 \sqcap \exists ((wrkFor \setminus (o_e \times \top)) \cup (o_e, o_{proj})).o_{proj} \end{aligned}$$

$\Psi_{e.wrkFor:=proj}(\varphi_{p-as-\ell_l})$ is obtained from $\varphi_{p-as-\ell_l}$ by substituting the *wrkFor* role with the correction $((wrkFor \setminus (o_e \times \top)) \cup (o_e, o_{proj}))$ which updates the value of o_e in *wrkFor* to *proj*. $\Phi_{S_{\ell_l}}(\varphi_{p-as-\ell_l})$ is obtained from $\Psi_{S_{\ell_l}}(\varphi_{p-as-\ell_l})$ by substituting P_1 with P_1^{ext} . Θ differs from Φ from technical reasons related to aborting computations (see Appendix E).

4 Related Work

Shape Analysis attracted considerable attention in the literature. The classical introductory paper to SL [23] presents an expressive SL which turned out to be undecidable. We have restricted our attention to the better behaved fragment in [7]. The work on SL focuses mostly on shape rather than content in our sense. SL has been extended to object oriented languages, cf. e.g. [22,11], where shape properties similar to those studied in the non object oriented case are the focus, and the main goal is to overcome difficulties introduced by the additional features of OO languages. Other shape analyses could be potential candidates for integration in our methodology. [24] use 3-valued logic to perform shape analysis. Regional logic is used to check correctness of program with shared

dynamica memory areas [5]. [16] uses nested tree automata to represent the heap. [20] combines monadic second order logic with SMT solvers.

Description Logics have not been considerd for verification of programs with dynamically allocated memory, with the exception of [13] whose use (mostly undecidable) DLs to express shape-type invariants, ignoring content information. In [9] the authors consider verification of loopless code (transactions) in graph databases with integrity constraints expressed in DLs. Verification of temporal properties of dynamic systems in the presence of DL knowledge bases has received significant attention (see [4,14] and their references). *Temporal Description Logics*, which combine classic DLs with classic temporal logics, have also received significant attention in the last decade (see [19] for a survey).

Related Ideas. Some recent papers have studied verification strategies which use information beyond the semantics of the source code. E.g., [18] is using diagrams from design documentation to support verification. [12,1] infer the intended use of program variables to guide a program analysis. Instead of starting from code and verifying its correctness, [15] explores how to declaratively specify data structures with sharing and how to automatically generate code from this specification. Given the importance of both DL as a formalism of content representation and of program verification, and given that both are widely studied, we were surprised to find little related work. However, we believe this stems from large differences between the research in the two communities, and from the interdisciplinary nature of the work involved.

References

1. S. Apel, D. Beyer, K. Friedberger, F. Raimondi, and A. von Rhein. Domain types: Abstract-domain selection based on variable usage. In *HVC*, pages 262–278, 2013.
2. A. Artale, D. Calvanese, R. Kontchakov, V. Ryzhikov, and M. Zakharyashev. Reasoning over extended ER models. In *Proc. of ER*, pages 277–292, 2007.
3. F. Baader, D. Calvanese, D. L. McGuinness, D. Nardi, and P. F. Patel-Schneider, editors. *The Description Logic handbook: theory, implementation, and applications*. Cambridge University Press, 2003.
4. F. Baader and B. Zarriß. Verification of golog programs over description logic actions. In *Proc. of FroCos*, pages 181–196. Springer, 2013.
5. A. Banerjee, D. A. Naumann, and S. Rosenberg. Local reasoning for global invariants, part I: Region logic. *J. ACM*, 60(3):18, 2013.
6. D. Berardi, D. Calvanese, and G. De Giacomo. Reasoning on UML class diagrams. *Artificial Intelligence*, 168(12):70 – 118, 2005.
7. J. Berdine, C. Calcagno, and P.W. O’Hearn. Symbolic execution with Separation Logic. In *APLAS*, volume 3780, pages 52–68. Springer-Verlag, 2005.
8. A. Borgida. On the relative expressiveness of description logics and predicate logics. *Artif. Intell.*, 82(1-2):353–367, 1996.
9. D. Calvanese, M. Ortiz, and M. Šimkus. Evolving graph databases under description logic constraints. In *Proc. of DL*, pages 120–131, 2013.
10. W. Charatonik and P. Witkowski. Two-variable logic with counting and trees. In *LICS*, pages 73–82, 2013.
11. W. Chin, C. David, H.H. Nguyen, and S. Qin. Enhancing modular oo verification with separation logic. *POPL*, pages 87–99. ACM, 2008.

12. Y. Demyanova, H. Veith, and F. Zuleger. On the concept of variable roles and its use in software analysis. In *FMCAD*, pages 226–230, 2013.
13. L. Georgieva and P. Maier. Description Logics for shape analysis. In *SEFM*, pages 321–331, 2005.
14. G. De Giacomo, Y. Lespérance, and F. Patrizi. Bounded situation calculus action theories and decidable verification. In *Proc. of KR*, 2012.
15. P. Hawkins, A. Aiken, K. Fisher, M. Rinard, and M. Sagiv. Data structure fusion. In *APLAS*, volume 6461 of *LNCS*, pages 204–221. Springer, 2010.
16. L. Holík, O. Lengál, A. Rogalewicz, J. Simácek, and T. Vojnar. Fully automated shape analysis based on forest automata. In *CAV*, 2013.
17. S. S. Ishtiaq and P. W. O’Hearn. Bi as an assertion language for mutable data structures. *POPL*, pages 14–26. ACM, 2001.
18. D. James, T. Leonard, J. O’Leary, M. Talupur, and M. R. Tuttle. Extracting models from design documents with mapster. *PODC*, 2008.
19. C. Lutz, F. Wolter, and M. Zakharyashev. Temporal description logics: A survey. In *Proc. of TIME*. IEEE Computer Society, 2008.
20. P. Madhusudan, G. Parlato, and X. Qiu. Decidable logics combining heap structures and data. *POPL*, pages 611–622. ACM, USA, 2011.
21. W3C OWL Working Group. *OWL 2 Web Ontology Language: Document Overview*. W3C Recommendation, 27 October 2009.
22. M. J. Parkinson and G. M. Bierman. Separation logic, abstraction and inheritance. *SIGPLAN Not.*, 43(1):75–86, January 2008.
23. J. C. Reynolds. Separation Logic: A logic for shared mutable data structures. In *Proc. of LICS*, pages 55–74, Washington, DC, USA, 2002. IEEE Computer Society.
24. G. Yorsh, T. Reps, and M. Sagiv. Symbolically computing most-precise abstract operations for shape analysis. In *TACAS*, pages 530–545. 2004.

A Separation Logic

Here we expand on the treatment of separation logic in the paper. We have defined the semantics of **SL** using our memory structures. The memory model used in [7] is very similar to our memory structures. We give the standard semantics of **SL** here in terms of heaps and stacks, and relate it to memory structures. It is convenient to define first **SL**, which does not allow list segments, and then extend to **SLs**.

The allocated cells of the memory all have the same finite collection of fields (denoted *Fields*). Let *Add* and *Val* be disjoint sets. *Add* is the set of addresses (*locations* in the terminology of [7], not to be confused with our use of “locations in a program”). *Val* is a set of values which include *nil*. The description of the memory consists of two parts, a heap and a stack. A heap is a partial function $h : Add \xrightarrow{\text{fin}} (Fields \rightarrow Val \cup Add)$ which is only defined on a finite subset of *Add*. A stack is a function from a finite set *Var* of local variables $s : Var \rightarrow Val \cup Add$.

The syntax of **SL** is as follows:

$$\begin{array}{ll}
 \begin{array}{l}
 var_i \in Var, i \in \mathbb{N} \\
 f_i \in Fields, i \in \mathbb{N} \\
 E ::= \text{null} \mid var_i
 \end{array}
 &
 \begin{array}{l}
 \Pi ::= \mathbf{T} \mid E = E \mid E \neq E \mid \Pi \wedge \Pi \\
 \Sigma ::= \text{emp} \mid \Sigma * \Sigma \mid \\
 var \mapsto [f_1 : E_1, \dots, f_k : E_k] \\
 \mathbf{SL}\text{-formula} ::= \Pi \mid \Sigma
 \end{array}
 \end{array}$$

When $\Pi = \mathbf{T}$ we write $\Pi \mid \Sigma$ simply as Σ . The semantics of **SL** is given by a relation $s, h \models \phi$ where $s \in Stacks, h \in Heaps$. We define $\llbracket var_i \rrbracket s \stackrel{\text{def}}{=} s(x)$ and $\llbracket \text{nil} \rrbracket s \stackrel{\text{def}}{=} \text{nil}$, and:

$$\begin{array}{ll}
 s, h \models \text{true} & \text{always} \\
 s, h \models E_1 = E_2 & \text{iff } \llbracket E_1 \rrbracket s = \llbracket E_2 \rrbracket s \\
 s, h \models E_1 \neq E_2 & \text{iff } \llbracket E_1 \rrbracket s \neq \llbracket E_2 \rrbracket s \\
 s, h \models \Pi_0 \wedge \Pi_1 & \text{iff } s, h \models \Pi_0 \text{ and } s, h \models \Pi_1 \\
 s, h \models var_1 \mapsto [f_i : E_i] & \text{iff } h = \llbracket var_1 \rrbracket s \rightarrow r \text{ where } r(f_i) = \llbracket E_i \rrbracket s \\
 s, h \models \text{emp} & \text{iff } h = \emptyset \\
 s, h \models \Sigma_1 * \Sigma_2 & \text{iff } \exists h_0 h_1. h = h_0 * h_1 \text{ and } s, h_0 \models \Sigma_0 \text{ and } s, h_1 \models \Sigma_1 \\
 s, h \models \Pi \mid \Sigma & \text{iff } s, h \models \Pi \text{ and } s, h \models \Sigma
 \end{array}$$

where $h_0 * h_1$ enforces there is no address in *Add* on which both h_0 and h_1 are defined, and $h = h_0 * h_1$ denotes that h is the union of h_0 and h_1 . Additionally, not all fields in *Fields* need to occur in $var_1 \mapsto [f_i : E_i]$, and those that do not are assigned *nil* implicitly.

SLs extends **SL** by adding list segments: the syntax is extended by

$$\Sigma ::= \dots \mid \text{ls}(E_1, E_2)$$

and the semantics of $\text{ls}(E_1, E_2)$ is the least fixed point of the predicate given by

$$(E_1 = E_2 \wedge \text{emp}) \vee (E_1 \neq E_2 \wedge \exists y. E_1 \mapsto [n : y] * \text{ls}(y, E_2))$$

Heaps and Stacks vs. Memory Structures The memory model of SL and our memory model are easily translatable. The distinction between values in Val and addresses in Add does not play a major role in [7], so we simplify by setting $Val = \{nil, true, false\}$.

Given \mathcal{M} we define $s_{\mathcal{M}}$ and $h_{\mathcal{M}}$ as follows. $Fields$ is equal to τ_{fields} and $Add = Addresses$ and we have $M = Val \cup Add$ with $nil = o_{\text{null}}^{\mathcal{M}}$, $true = o_{\text{T}}^{\mathcal{M}}$ and $false = o_{\text{F}}^{\mathcal{M}}$. For every variable var_i , $s(var_i) = o_{var_i}^{\mathcal{M}}$. For every $add \in Add$ we define $h(add) = h_{add}$ as follows: for every $f \in Fields$, $h_{add}(f) = f^{\mathcal{M}}(add)$.

Given s and h , we define $\mathcal{M}_{s,h} = \mathcal{M}$ as follows. The universe $M_{s,h}$ is $Add \cup \{o_{\text{null}}^{\mathcal{M}}, o_{\text{T}}^{\mathcal{M}}, o_{\text{F}}^{\mathcal{M}}\}$, with $o_{\text{null}}^{\mathcal{M}} = nil$, $o_{\text{T}}^{\mathcal{M}} = true$ and $o_{\text{F}}^{\mathcal{M}} = false$ and $Addresses^{\mathcal{M}} = Add$. The set of addresses on which h is defined is $Alloc^{\mathcal{M}}$. For every field $f \in Fields$, $f^{\mathcal{M}} = h_f$, where $h_f(add) = h(add)(f)$ is the value the field f of address add receives under h . For every variable var_i , $o_{var_i}^{\mathcal{M}_{s,h}} = s(var_i)$.

The above shows how to transform the memory models into each other in a natural way. More precisely:

Lemma 6. *If s, h are a stack and a heap, and if $s_{\mathcal{M}_{s,h}}, h_{\mathcal{M}_{s,h}}$ are the stack and heap obtained by applying the above transformations on s and h in order, then $s_{\mathcal{M}_{s,h}} = s$ and $h_{\mathcal{M}_{s,h}} = h$.*

Remark 1. The semantics of the standard programming language used with separation logic allows memory cells to be reallocated, while our programming language forbids this for technical simplicity.

B CT^2 -Satisfiability in Memory Structures

In this appendix we prove Lemma 1, i.e. we show that satisfiability of CT^2 formulae by memory structures is in NEXPTIME. We employ the fact that *finite satisfiability* of CT^2 -formulae, i.e. truth in a structure with a finite domain, is in NEXPTIME:

Theorem 3 (W. Charatonik and P. Witkowski [10]). *Finite satisfiability of CT^2 is NEXPTIME-complete.*

To show that satisfiability of a formula $\psi \in CT^2$ in a memory structure can be decided in non deterministic exponential time, it suffices to construct in linear time a formula $\psi_m \in C^2$ such that ψ is satisfiable in a memory structure iff $\psi_m \wedge \psi$ is finitely satisfiable. The formula ψ_m is the conjunction of formulae corresponding to requirements (3)-(9) we placed on memory structures. The conjoined formulae are the the translations using $tr : \mathcal{L} \rightarrow C^2$ from Table 1 of the following formulae:

- $Aux \equiv o_{\text{null}} \sqcup o_{\text{T}} \sqcup o_{\text{F}}$,
- $Addresses \sqsubseteq \neg Aux$ and $Addresses \sqcup Aux \equiv \top$,
- $Alloc \sqsubseteq \neg MemPool$, $Alloc \sqsubseteq \neg PossibleTargets$, $MemPool \sqsubseteq \neg PossibleTargets$, and
 $Alloc \sqcup PossibleTargets \sqcup MemPool \sqsubseteq Addresses$,

$tr_z(C) = C(z)$	C is an atomic concept
$tr_{z,\bar{z}}(r) = r(z, \bar{z})$	r is an atomic role
$tr_z(C \sqcap D) = tr_z(C) \wedge tr_z(D)$	
$tr_z(C \sqcup D) = tr_z(C) \vee tr_z(D)$	
$tr_z(\neg C) = \neg tr_z(C)$	
$tr_{z,\bar{z}}(r \sqcap s) = tr_{z,\bar{z}}(r) \wedge tr_{z,\bar{z}}(s)$	
$tr_{z,\bar{z}}(r \sqcup s) = tr_{z,\bar{z}}(r) \vee tr_{z,\bar{z}}(s)$	
$tr_{z,\bar{z}}(r \setminus s) = tr_{z,\bar{z}}(r) \wedge \neg tr_{z,\bar{z}}(s)$	
$tr_{z,\bar{z}}(r^-) = tr_{\bar{z},z}(r)$	
$tr_{z,\bar{z}}(C \times D) = tr_z(C) \wedge tr_{\bar{z}}(D)$	
$tr_z(\exists r.C) = \exists y. tr_{z,\bar{z}}(r) \wedge tr_{\bar{z}}(C)$	
$tr(C \sqsubseteq D) = \forall x. tr_x(C) \rightarrow tr_x(D)$	
$tr(r \sqsubseteq s) = \forall x, y. tr_{x,y}(r) \rightarrow tr_{x,y}(s)$	
$tr(\varphi \wedge \psi) = tr(\varphi) \wedge tr(\psi)$	
$tr(\varphi \vee \psi) = tr(\varphi) \vee tr(\psi)$	
$tr(\neg \varphi) = \neg tr(\varphi)$	
$tr(func(r)) = \forall x \exists^{\leq 1} y. tr_{x,y}(r)$	
$tr(\neg \varphi) = \neg tr(\varphi)$	

Table 1. Translation of \mathcal{L} into \mathcal{C}^2 by employing only two variables x and y . In each translation rule, $z \in \{x, y\}$. Moreover, $\bar{z} = y$ if $z = x$, and $\bar{z} = x$ if $z = y$.

- $o \sqsubseteq \neg MemPool$ for every constant symbol o in ψ ,
- $func(f)$ and $Addresses \sqsubseteq \exists f. \neg MemPool$ for every f of ψ with $f \in \tau_{\text{fields}}$,
- $MemPool \sqsubseteq \exists f. o_{\text{null}} \sqcup o_{\mathbf{F}}$ for every $f \in \tau_{\text{fields}}$, and
- $C \sqsubseteq \neg MemPool$ for every atomic concept $C \in \tau$ with $C \neq MemPool$.

Requirements (1) and (2) hold by the correct choice of vocabulary. To see that requirement (10) holds, namely that $Alloc^{\mathcal{M}}$ and $PossibleTargets^{\mathcal{M}}$ are finite while $MemPool^{\mathcal{M}}$ is infinite, note that any finite model \mathcal{M} of $\psi_m \wedge \psi$ is almost the desired memory structure with $\mathcal{M} \models \psi$. The desired \mathcal{M} is obtained by adding to $MemPool^{\mathcal{M}}$ infinitely many fresh elements e and setting $f^{\mathcal{M}}(e) = o_{\text{null}}^{\mathcal{M}}$ for all $f \in \tau_{\text{fields}}$.

C Translations of \mathcal{L} and \mathbf{SL}_{ls} into CT^2

As discussed in Section 2.6, α translates \mathbf{SL}_{ls} -formulae into \mathcal{L} almost exactly, with the caveat that for every list L , some redundant cycles may exist in L . These cycles are not reachable from the variables of the head variable of the list through the *next* pointer. Since \mathcal{L} is a fragment of first order logic, properties related to connectivity cannot be used to rule out these cycles. We use CT^2 to express the necessary connectivity property. Recall $\beta^5(\text{ls})$ stated that the forest F_1 coincides with *next* inside L and that the forest induced by F_1 on L is a tree.

Here we define the two translations α and β so that they satisfy the Lemmas 3 and 4, restated here:

Lemma 7. *i. For every heap h and stack s , if $\varphi \in \mathbf{SL}_{\mathbf{ls}}$ then: if $s, h \models \varphi$ then $\mathcal{M}_{s,h} \models \alpha(\varphi)$.*

ii. For every heap h and stack s , if $\varphi \in \mathbf{SL}_{\mathbf{ls}}$ then: $s, h \models \varphi$ iff $\mathcal{M}_{s,h} \models \beta(\varphi)$.

It is convenient to define the following notation: if $\varphi = \Pi \upharpoonright \Sigma$, then there exist $\delta_1, \dots, \delta_r$ such that $\Sigma = \delta_1 * \dots * \delta_r$ and the δ_i are of the form $var_1 \mapsto [f_i : E_i]$. We use the concepts P_1, \dots, P_r which partition the allocated memory cells according to Σ .

First we define the formula $\alpha(\varphi)$ for $\varphi \in \mathbf{SL}$.

$$\begin{aligned}\alpha(E_1 = E_2) &= (o_{E_1} \equiv o_{E_2}) \\ \alpha(E_1 \neq E_2) &= \neg(o_{E_1} \equiv o_{E_2}) \\ \alpha(\Pi_0 \wedge \Pi_1) &= \alpha(\Pi_0) \wedge \alpha(\Pi_1) \\ \alpha(true) &= (\top \sqsubseteq \top) \\ \alpha(emp) &= (Alloc \equiv \perp) \\ \alpha(\delta_t) &= (P_t \equiv o_{var_1}) \wedge \bigwedge_{i=1}^k ((o_{var_1}, o_{E_i}) \sqsubseteq f_i), \\ &\quad \text{for } \delta_t = var_1 \mapsto [f_i : E_i : i = 1, \dots, k] \\ \alpha(\Sigma) &= \bigwedge_{1 \leq t \leq r} \alpha(\delta_t) \wedge \\ &\quad \bigwedge_{1 \leq t_1 < t_2 \leq r} (P_{t_1} \sqcap P_{t_2} \equiv \perp) \\ \alpha(\Pi \upharpoonright \Sigma) &= P_1 \sqcup \dots \sqcup P_r \equiv Alloc \wedge \alpha(\Pi) \wedge \alpha(\Sigma)\end{aligned}$$

By construction we have for every $\varphi \in \mathbf{SL}$, $s, h \models \varphi$ iff $\mathcal{M}_{s,h} \models \alpha(\varphi)$.

Now we turn to $\mathbf{SL}_{\mathbf{ls}}$. Here $\Sigma = \delta_1 * \dots * \delta_r$ where the δ_i are of either of the forms $var_1 \mapsto [f_i : E_i]$ or $ls(E_1, E_2)$. If $\delta_i = ls(E_1, E_2)$, then $\alpha(\delta_i)$ is defined similarly to the definition of $\alpha(ls)$ in Section 2.6 using P_i , E_1 and E_2 :

$$\begin{aligned}\alpha^1(\delta_i) &= (o_{E_1} \sqsubseteq P_i) \\ \alpha^2(\delta_i) &= (o_{E_2} \sqsubseteq \exists next^-.P_i) \\ \alpha^3(\delta_i) &= (o_{E_2} \sqsubseteq \neg P_i) \\ \alpha^4(\delta_i) &= (P_i \sqsubseteq o_{E_1} \sqcup \exists next^-.P_i)\end{aligned}$$

Let

$$\begin{aligned}\alpha_{emp-ls}(\delta_i) &= (P_i \sqsubseteq \perp) \wedge (o_{E_1} = o_{E_2}) \\ \alpha(\delta_i) &= \alpha^1(\delta_i) \wedge \dots \wedge \alpha^4(\delta_i) \vee \alpha_{emp-ls}(\delta_i)\end{aligned}$$

and $\alpha(ls(E_1, E_2)) = \alpha^1(ls(E_1, E_2)) \wedge \dots \wedge \alpha^4(ls(E_1, E_2))$.

Now we turn the translation β . Similarly to $\beta^5(ls)$ from Section 2.6, we define $\beta^5(\delta_i)$ for each $\delta_i = ls(E_1, E_2)$ as:

$$\begin{aligned}\forall x \forall y [(P_i(x) \wedge P_i(y)) \rightarrow (F_1(x, y) \leftrightarrow next(x, y))] \wedge \\ \forall x [(P_i(x) \wedge \forall y (P_i(y) \rightarrow \neg F_1(y, x))) \rightarrow (x \approx o_{var_1})]\end{aligned}$$

$\beta^5(\delta_i)$ states that the forest F_1 coincides with $next$ inside L and that the forest induced by F_1 on P_i is a tree. Let $I \subseteq \{1, \dots, r\}$ be the set of i such that δ_i is of the form $ls(E_1, E_2)$. Let

$$\begin{aligned}\beta^5(\Sigma) &= \bigwedge_{i \in I} \beta^5(\delta_i) \\ \beta(\Pi \upharpoonright \Sigma) &= \exists F_1 \text{tr}(\alpha(\Pi \upharpoonright \Sigma)) \wedge \beta^5(\Sigma) \wedge \varphi_{forest}(F_1)\end{aligned}$$

Note that to get that $\beta^5(\Sigma)$ indeed states the connectivity condition for each of the lists we use the fact that P_1, \dots, P_r are disjoint, and therefore the trees we quantify for the different lists are disjoint.

D Cyclic Data Structures in CT^2

Here we want to clarify that cyclic data structures such as cyclic lists which are expressible in **SLIs** are translated correctly into CT^2 by β .

Consider the formula $ls(a, b) * ls(b, a)$ which defines a cyclic list with at least two elements. In the translation to CT^2 , P_1 contains the elements of the list from a to b , and P_2 contains the elements of the list from b to a . Importantly, b does not belong to P_1 , and a does not belong to P_2 . This is captured by α^3 in the translation of **SLIs** to \mathcal{L} in Section 2.6 or Appendix C.

The translation requires (in β^5) that the forest F_1 coincides with *next inside* P_1 and P_2 . However, crucially, there is no requirement on *next between* P_1 and P_2 , see the definitions of β^5 and β in Section 2.6 and Appendix C.

As a result, in the cyclic list $ls(a, b) * ls(b, a)$, not all *next* edges are required to belong to F_1 . Rather, the two edges that point to a and to b respectively are not required to belong to F_1 .

In more detail, if $\mathcal{M} \models ls(a, b) * ls(b, a)$ then:

1. $P_1^{\mathcal{M}} = \{a_1, \dots, a_i\}$ such that $a_1 = a$ and the edges (a_j, a_{j+1}) belong both to $next^{\mathcal{M}}$ and to $F_1^{\mathcal{M}}$, for $1 \leq j \leq i-1$.
2. The edge (a_i, b) belongs to $next^{\mathcal{M}}$ but might not belong to $F_1^{\mathcal{M}}$.
3. $P_2^{\mathcal{M}} = \{b_1, \dots, b_k\}$ such that $b_1 = b$ and the edges (b_j, b_{j+1}) belong both to $next^{\mathcal{M}}$ and to $F_1^{\mathcal{M}}$, for $1 \leq j \leq k-1$.
4. The edge (b_k, a) belongs to $next^{\mathcal{M}}$ but might not belong to $F_1^{\mathcal{M}}$.

Additionally note that the translation of a formula of the form $var_1 \mapsto [f_i : E_i]$ also does not require the *next* edge from var_1 to belong to F_1 .

E Backwards propagation

Here we give the exact formulation of the backwards propagation lemma and prove it.

It is convenient to consider a program \overline{S} , which behaves like S , except that it does not abort. \overline{S} uses a fresh variable *abo* to indicate whether S aborts. The command $abo := \mathbf{F}$ is added at the beginning of the code. Every command C of the form $var_1 := var_2.f$, $var_2.f := var_1$ or $dispose(var_2)$ is replaced with $\overline{C} = if var_2 = \text{null} then abo := \mathbf{T} else C fi$. For *if*, *assume* and assignments of the form $var_1.f_1 := var_2.f_2$ commands the case is similar, except that there may be two evaluations of the form $var_i.f_j$, which need to be reflected in the condition in \overline{C} . By the construction of \overline{S} , \overline{S} has the following properties:

1. The run of \mathcal{M}_1 on \overline{S} does not abort for any \mathcal{M}_1 .

2. abo has the value \mathbf{T} at the end of the run of \bar{S} on \mathcal{M}_1 if and only if S aborts on \mathcal{M}_1 .
3. If $\langle S, \mathcal{M}_1 \rangle \rightsquigarrow \mathcal{M}_2$, then $\langle \bar{S}, \mathcal{M}_1 \rangle \rightsquigarrow \mathcal{M}_2$.

We need a further extension of our structures, which uses a refined \rightsquigarrow relation. The refined \rightsquigarrow relation will get rid of some non-determinism in the semantics of the programming language.

Given a finite set Y of labels and a tuple $\bar{d}_Y = (d_y : y \in Y)$ of elements of M , we denote by $\langle \mathcal{M}_1, (\bar{R}^{ext})^{\mathcal{M}_1}, \bar{d}_Y \rangle$ the structure obtained from $\langle \mathcal{M}_1, (\bar{R}^{ext})^{\mathcal{M}_1} \rangle$ by adding the constants d_y for each $y \in Y$. The vocabulary τ_Y^{ext} of $\langle \mathcal{M}_1, (\bar{R}^{ext})^{\mathcal{M}_1}, \bar{d}_Y \rangle$ extends τ^{ext} by constant symbols $\{o_y : y \in Y\}$.

Given a loopless program S' , we assign unique labels y to the commands of S' . For any loopless program S' , we denote by $Y_{S'}$ the set of labels of commands in S' . The $\rightsquigarrow_{\bar{d}_{Y_{S'}}}$ relation is obtained from the \rightsquigarrow relation as follows:

$\langle S', \mathcal{M}_1 \rangle \rightsquigarrow_{\bar{d}_{Y_{S'}}} \mathcal{M}_2$ iff $\langle S', \mathcal{M}_1 \rangle \rightsquigarrow \mathcal{M}_2$, except in the three following cases for S' :

- $y : var_1 := var_2.f : \langle S', \mathcal{M}_1 \rangle \rightsquigarrow_{d_y} \mathcal{M}_2$ iff $\langle S', \mathcal{M}_1 \rangle \rightsquigarrow \mathcal{M}_2$ and $f^{\mathcal{M}_1}(o_{var_2}^{\mathcal{M}_1}) = d_y$. Else, $\langle S', \mathcal{M}_1 \rangle \rightsquigarrow_{d_y} \text{abort}$.
- $y : var := new : \langle S', \mathcal{M}_1 \rangle \rightsquigarrow_{d_y} \mathcal{M}_2$ iff $\langle S', \mathcal{M}_1 \rangle \rightsquigarrow \mathcal{M}_2$ and $o_{var}^{\mathcal{M}_2} = d_y$. Otherwise, $\langle S', \mathcal{M}_1 \rangle \rightsquigarrow_{d_y} \text{abort}$.
- $S'_1; S'_2$: If $\langle S'_1, \mathcal{M}_1 \rangle \rightsquigarrow_{\bar{d}_{Y_{S'_1}}} \mathcal{M}'$ and $\langle S'_2, \mathcal{M}' \rangle \rightsquigarrow_{\bar{d}_{Y_{S'_2}}} \mathcal{M}_2$, then $\langle S'_1; S'_2, \mathcal{M}_1 \rangle \rightsquigarrow_{\bar{d}_{Y_{S'_1}} \cup \bar{d}_{Y_{S'_2}}} \mathcal{M}_2$.

The main observation is:

Lemma 8. *For any two memory structures \mathcal{M}_1 and \mathcal{M}_2 , $\langle S', \mathcal{M}_1 \rangle \rightsquigarrow \mathcal{M}_2$ iff there exists a tuple $\bar{d}_{Y_{S'}}$ such that $\langle S', \mathcal{M}_1 \rangle \rightsquigarrow_{\bar{d}_{Y_{S'}}} \mathcal{M}_2$.*

We are now ready to state Lemma 5 precisely:

Lemma 9. *Let S be a loopless program, $Y_{\bar{S}}$ be the set of labels of commands in \bar{S} , \mathcal{M}_1 and \mathcal{M}_2 be memory structures, $\bar{d}_{Y_{\bar{S}}}$ be a tuple of M elements labeled with the labels in $Y_{\bar{S}}$, $d_{abo} \in M$, and φ be an \mathcal{L} -formula over τ .*

1. If $\langle S, \mathcal{M}_1 \rangle \rightsquigarrow_{\bar{d}_{Y_{\bar{S}}}} \mathcal{M}_2$, then:
 $\mathcal{M}_2 \models \varphi$ iff $\langle \mathcal{M}_1, (\bar{R}^{ext})^{\mathcal{M}_1}, \bar{d}_{Y_{\bar{S}}}, d_{abo} \rangle \models \Theta_S(\varphi)$.
2. If $\langle S, \mathcal{M}_1 \rangle \rightsquigarrow_{\bar{d}_{Y_{\bar{S}}}} \text{abort}$, then for every tuple $\bar{d}_{Y_{\bar{S}}}$ of M elements, $\langle \mathcal{M}_1, (\bar{R}^{ext})^{\mathcal{M}_1}, \bar{d}_{Y_{\bar{S}}}, d_{abo} \rangle \not\models \Theta_S(\varphi)$.

The vocabulary of the structure $\langle \mathcal{M}_1, (\bar{R}^{ext})^{\mathcal{M}_1}, \bar{d}_{Y_{\bar{S}}}, d_{abo} \rangle$ is $\tau_{Y_{\bar{S}}}^{ext} \cup \{o_{abo}\}$.

The definition of Θ_S is:

Definition 8. $\Theta_S(\varphi) = \Phi_{\bar{S}}(\varphi \wedge (o_{abo} \equiv o_F))$, Φ is obtained from Ψ by substituting every symbol $R \in \tau^{rem}$ in φ by R^{ext} , and Ψ is defined as:

$$\begin{aligned}
\Psi_{skip}(\varphi) &= \varphi \\
\Psi_{var_1:=e}(\varphi) &= \varphi[o_{var_1}/o_e], e = var_2 \text{ or } e = \text{null} \\
\Psi_{y:var_1:=var_2.f}(\varphi) &= \varphi[o_{var_1}/o_y] \wedge (\exists f^-.o_{var_2} \equiv o_y) \\
\Psi_{var_1.f:=e}(\varphi) &= \varphi[f/f \setminus (o_{var_1} \times \top) \cup (o_{var_1}, o_e)], \\
&\quad \text{where } e = var_2 \text{ or } e = \text{null} \\
\Psi_{if\ b\ then\ S_1\ else\ S_2\ fi}(\varphi) &= \varepsilon_b \wedge \Psi_{S_1}(\varphi) \vee \neg \varepsilon_b \wedge \Psi_{S_2}(\varphi) \\
\Psi_{y:var:=new}(\varphi) &= \varphi[o_{var}/o_y][Alloc/Alloc \sqcup o_y] \\
&\quad \wedge o_y \sqsubseteq \neg Alloc \\
\Psi_{dispose(var)}(\varphi) &= \Psi_{S_{disp}}(\varphi[Alloc/Alloc \sqcap \neg o_{var}]), \\
&\quad \text{where } S_{disp} = var.f_{k_1} := \text{null}; \\
&\quad \dots; var.f_{k_w} := \text{null} \\
\Psi_{S_1;S_2}(\varphi) &= \Psi_{S_1}(\Psi_{S_2}(\varphi))
\end{aligned}$$

The notation $\varphi[A/B]$ should be interpreted as the syntactic replacement of any occurrence of A with B . We write e.g. $y : var := new$ to indicate that the command $var := new$ is labeled with y . ε_b is defined inductively: for $e_1 = e_2$ we set $\varepsilon_b = (A_{e_1} \equiv A_{e_2})$, with $A_{var} = o_{var}$ and $A_{var.f} = \exists f^-.o_{var}$; ε extends naturally to the Boolean connectives. In the definition of $\Psi_{dispose(var)}$, f_{k_1}, \dots, f_{k_w} are the members of τ fields which occur in φ . W.l.o.g. we assume that S does not contain commands of the form $if\ b\ then\ S_1\ fi$ or $var_1.f_1 := var_2.f_2$, since they can be expressed using the other commands.

To prove Lemma 9 we need the following lemma:

Lemma 10. Let S be a loopless program without assume commands, Y_S be the set of labels of commands in S , Y be a set of labels disjoint from Y_S , \mathcal{M}_1 and \mathcal{M}_2 be memory structures with universe M and \bar{d}_{Y_S} a tuple of M elements such that $\langle S, \mathcal{M}_1 \rangle \sim_{\bar{d}_{Y_S}} \mathcal{M}_2$. Let \bar{d}_Y be a tuple of M elements and φ be an \mathcal{L} -formula over $\tau \cup \{o_y : y \in Y\}$. $\langle \mathcal{M}_2, \bar{d}_Y \rangle \models \varphi$ iff $\langle \mathcal{M}_1, (\bar{R}^{ext})^{\mathcal{M}_1}, \bar{d}_Y, \bar{d}_{Y_S} \rangle \models \Phi_S(\varphi)$.

Proof. We prove the lemma by induction.

- $S = \text{skip}$: $Y_S = \emptyset$, and we have $\langle \mathcal{M}_2, \bar{d}_Y \rangle \models \varphi$ iff $\langle \mathcal{M}_1, \bar{R}^{ext}, \bar{d}_Y \rangle \models \Phi_S(\varphi)$, as required.
- $S = \text{if } b \text{ then } S_1 \text{ else } S_2 \text{ fi}$: depending on whether ε_b is true or false, $\Phi_{S_1}(\varphi)$ or $\Phi_{S_2}(\varphi)$ should be used.
- $var_1 := e$, where e is a variable var_2 or null: every reference to var_1 in φ is replaced by a reference to var_2 or null, respectively.
- $var_1 := var_2.f$: every reference to var_1 in φ is replaced with a reference to o_y , whose interpretation is d_y , in accordance with $\sim_{\bar{d}_{Y_S}}$, which requires that d_y be the result of applying f on var_2 .
- $var_1.f := e$, where e is a variable var_2 or null: the function symbol f is updated by removing the current value of f on var_1 by subtracting $(o_{var_1} \times \top)^{\mathcal{M}_1}$ from $f^{\mathcal{M}_1}$ and setting the new value explicitly by adding the pair $(o_{var_1}^{\mathcal{M}_1}, o_e^{\mathcal{M}_1})$ to $f^{\mathcal{M}_1}$.

- $S = \text{var} := \text{new}$ with label y : $Y_S = \{y\}$ and $\bar{d}_{Y_S} = (d_y)$. By the definition of $\sim_{\bar{d}_{Y_S}}$ for new commands, $\{d_y\} = \text{Alloc}^{\mathcal{M}_2} \setminus \text{Alloc}^{\mathcal{M}_1}$. $\Phi_S(\varphi)$ adds o_y to Alloc and replaces every reference to var by a reference to o_y .
- $S = \text{dispose}(\text{var})$: $\Phi_S(\varphi)$ removes var from Alloc , and using an application of Φ to the program $\text{var}.f_{k_1} := \text{null}; \dots; \text{var}.f_{k_w} := \text{null}$, sets all of the fields in φ to null.
- $S = S_1; S_2$: $\Phi_S(\varphi) = \Phi_{S_1}(\Phi_{S_2}(\varphi))$. Let \mathcal{M}_3 be a memory structure such that $\langle S_1, \mathcal{M}_1 \rangle \sim_{\bar{d}_{Y_{S_1}}} \mathcal{M}_3$ and $\langle S_2, \mathcal{M}_3 \rangle \sim_{\bar{d}_{Y_{S_2}}} \mathcal{M}_2$. We have $\bar{d}_{Y_S} = \bar{d}_{Y_{S_1}} \cup \bar{d}_{Y_{S_2}}$. Consider first $\Phi_{S_2}(\varphi)$. By the induction hypothesis, $\langle \mathcal{M}_2, \bar{d}_Y \rangle \models \varphi$ iff $\langle \mathcal{M}_3, \bar{R}^{\mathcal{M}_2}, \bar{d}_Y, \bar{d}_{Y_{S_2}} \rangle \models \Phi_{S_2}(\varphi)$. Let \mathcal{M}_4 be obtained from \mathcal{M}_3 by replacing every relation $R^{\mathcal{M}_3}$ with $R^{\mathcal{M}_2}$ for $R \in \tau^{\text{rem}}$. We have $\Psi_{S_2}(\varphi) \models \langle \mathcal{M}_4, \bar{d}_Y, \bar{d}_{Y_{S_2}} \rangle$ iff $\Phi_{S_2}(\varphi) \models \langle \mathcal{M}_3, \bar{R}^{\mathcal{M}_2}, \bar{d}_Y, \bar{d}_{Y_{S_2}} \rangle$. Since we have $\langle S_2, \mathcal{M}_4 \rangle \sim_{\bar{d}_{Y_{S_2}}} \mathcal{M}_2$, we can apply the induction hypothesis once again, this time on Ψ_{S_2} . We get that $\langle \mathcal{M}_4, \bar{d}_Y, \bar{d}_{Y_{S_2}} \rangle \models \varphi$ iff $\langle \mathcal{M}_1, \bar{d}_Y, \bar{d}_{Y_{S_2}}, \bar{d}_{Y_{S_1}} \rangle \models \Phi_{S_1}(\Phi_{S_2}(\varphi))$. Hence, $\langle \mathcal{M}_2, \bar{d}_Y \rangle \models \varphi$ iff $\langle \mathcal{M}_1, \bar{R}^{\mathcal{M}_2}, \bar{d}_Y, \bar{d}_{Y_S} \rangle \models \Phi_{S_1}(\Phi_{S_2}(\varphi))$.

Proof (Proof of Lemma 9).

Using Lemma 10 with $Y = \emptyset$, if $\langle S, \mathcal{M}_1 \rangle \sim_{\bar{d}_{Y_S}}$ abort, then for every tuple of relations \bar{U} interpreting \bar{R}^{ext} we have $\langle \mathcal{M}_1, \bar{U}, \bar{d}_{Y_S}, d_{abo} \rangle \not\models \Phi_{\bar{S}}(\varphi \wedge (o_{abo} \equiv o_F))$, because abo is set to true during the run of \bar{S} . If $\langle S, \mathcal{M}_1 \rangle \sim_{\bar{d}_{Y_S}} \mathcal{M}_2$, $\mathcal{M}_2 \models \varphi$ iff $\langle \mathcal{M}_1, \bar{d}_{Y_S}, d_{abo} \rangle \models \Phi_{\bar{S}}(\varphi \wedge (o_{abo} \equiv o_F))$.

Note that d_{abo} is the value of abo at the beginning of the run of \bar{S} . Since the first command of \bar{S} assigns abo a new value, d_{abo} plays no role (it appears because, technically, abo still needs a value at the beginning of the run).

Also note that in Lemma 5, $\bar{d}_{Y_{\bar{S}}}$ strictly extends \bar{d}_{Y_S} , since \bar{S} extends S . However, the semantics of all of the new commands in \bar{S} does not actually depend on the relevant d_y (since none of them of new commands or assignments of the form $\text{var}_1.\text{var}_2.f$). Hence, any extension of \bar{d}_{Y_S} into $\bar{d}_{Y_{\bar{S}}}$ will do.

Remark 2. Revisiting the example in Section 3.5 with the detailed version of Lemma 9 in mind, we now see that Θ is actually the backwards propagation of programs of the form \bar{S} . The backward propagation of $\lambda(\ell_l.\ell_l)$ is similar to that presented in Section 3.5, with $\Theta_{\lambda(\ell_l.\ell_l)}(\varphi_{p-as-\ell_l}) = \Phi_{\lambda(\ell_l)}(\varphi_{p-as-\ell_l} \wedge (o_{abo} \equiv o_F))$.

F Soundness and Completeness Theorems

Here we restate and prove Theorems 1 and 2:

Theorem 1. *Let G be a program such that shp is inductive for Init and $\text{Init} \models \text{cnt}(\ell_{\text{init}})$. The following statements are equivalent:*

- (i) *For all $e \in E$, $\text{VC}(e)$ holds.*
- (ii) *cnt is inductive for Init relative to shp .*

Proof. Assume $VC(e)$ holds for every $e \in E$. Let $e = (\ell_1, \ell_2) \in E$ and memory structures \mathcal{M}_1 and \mathcal{M}_2 such that $\mathcal{M}_1 \models g(\ell_1)$ and $\langle \lambda(e), \mathcal{M}_1 \rangle \sim \mathcal{M}_2$. Since $\mathcal{M}_1 \models g(\ell_1)$ we have $s_{\mathcal{M}_1}, h_{\mathcal{M}_1} \models shp(\ell_1)$ and $\mathcal{M}_1 \models g(\ell_1)$. Since shp is inductive, $s_{\mathcal{M}_2}, h_{\mathcal{M}_2} \models shp(\ell_2)$. There exists a tuple $\bar{d}_{Y_{\lambda(e)}}$ such that $\langle \lambda(e), \mathcal{M}_1 \rangle \sim_{\bar{d}_{Y_{\lambda(e)}}} \mathcal{M}_2$.

Let $(\bar{R}^{ext})^{\mathcal{M}_1}$ be the tuple of copies of $R^{\mathcal{M}_2}$ relations from Section 3.5, i.e. $(\bar{R}^{ext})^{\mathcal{M}_1}$ is $((R^{ext})^{\mathcal{M}_1} : (R^{ext})^{\mathcal{M}_1} = R^{\mathcal{M}_2} \text{ and } R \in \tau \setminus \tau_{\text{fields}})$. Let $\mathcal{N} = \langle \mathcal{M}_1, (\bar{R}^{ext})^{\mathcal{M}_1}, \bar{d}_{Y_{\lambda(e)}} \rangle$. Since $s_{\mathcal{M}_1}, h_{\mathcal{M}_1} \models shp(\ell_1)$ and $\mathcal{M}_1 \models cnt(\ell_1)$, $\mathcal{N} \models \beta(shp(\ell_1)) \wedge tr(cnt(\ell_1))$.

By Lemma 9, $\mathcal{N} \models \Theta_{\lambda(e)}(\alpha(shp(\ell_2)) \wedge \neg cnt(\ell_2))$ iff $\mathcal{M} \models \alpha(shp(\ell_2)) \wedge \neg cnt(\ell_2)$. Since $\mathcal{N} \models VC(e)$ and $\mathcal{N} \models \beta(shp(\ell_1)) \wedge tr(cnt(\ell_1))$, it must be that $\mathcal{N} \not\models \Theta_{\lambda(e)}(\alpha(shp(\ell_2)) \wedge \neg cnt(\ell_2))$, so $\mathcal{M} \not\models \alpha(shp(\ell_2)) \wedge \neg cnt(\ell_2)$. Since $\mathcal{M} \models \beta(shp(\ell_2))$, in particular $\mathcal{M} \models \alpha(shp(\ell_2))$. Hence $\mathcal{M} \models cnt(\ell_2)$. We get that cnt is inductive for $Init$ relative to shp .

Conversely, assume cnt is inductive for $Init$ relative to shp . Assume for contradiction that there exists $e = (\ell_1, \ell_2) \in E$ such that $VC(e)$ does not hold. Then there exists a memory structure \mathcal{N} such that

$$\begin{aligned} \mathcal{N} &\models \beta(shp(\ell_1)) \wedge tr(cnt(\ell_1)) \\ &\wedge tr(\Theta_{\lambda(e)}(\alpha(shp(\ell_2)) \wedge \neg cnt(\ell_2))) \end{aligned}$$

Let $\mathcal{N} = \langle \mathcal{M}_1, (\bar{R}^{ext})^{\mathcal{M}_1}, \bar{d}_{Y_{\lambda(e)}}, d_{abo} \rangle$. Then \mathcal{M}_1 is also a memory structure and $\mathcal{M}_1 \models \beta(shp(\ell_1)) \wedge tr(cnt(\ell_1))$, so $s_{\mathcal{M}_1}, h_{\mathcal{M}_1} \models shp(\ell_1)$ and $\mathcal{M}_1 \models cnt(\ell_1)$. Since $\mathcal{N} \models \Theta_{\lambda(e)}(\dots)$, abo must not be set to true in the computation of $\lambda(e)$ starting from \mathcal{M}_1 with $\bar{d}_{Y_{\lambda(e)}}$. Therefore, there exists \mathcal{M}_2 such that $\langle \lambda(e), \mathcal{M}_1 \rangle \sim_{\bar{d}_{Y_{\lambda(e)}}} \mathcal{M}_2$. Since the computation of $\lambda(e)$ is not affected by the interpretations of $R \in \tau \setminus \tau_{\text{fields}}$, assume w.l.o.g. that for each $R \in \tau \setminus \tau_{\text{fields}}$, $R^{\mathcal{M}} = (R^{ext})^{\mathcal{M}_1}$. Since $\langle \lambda(e), \mathcal{M}_1 \rangle \sim \mathcal{M}_2$ and $s_{\mathcal{M}_1}, h_{\mathcal{M}_1} \models shp(\ell_1)$, we get $s_{\mathcal{M}_2}, h_{\mathcal{M}_2} \models shp(\ell_2)$. By Lemma 9, $\mathcal{M}_2 \models \alpha(shp(\ell_2)) \wedge \neg cnt(\ell_2)$. In particular, $\mathcal{M}_2 \not\models cnt(\ell_2)$, in contradiction to cnt being inductive relative to shp .

For every $e = (\ell_1, \ell_2) \in E$, let $Reach(e)$ be the set of memory structures $\mathcal{M} \in Reach(\ell_2)$ for which there exist $\mathcal{M}_{init} \in Init$ and a path P in G starting at ℓ_{init} and ending with e such that $\langle P, \mathcal{M}_{init} \rangle \sim^* \mathcal{M}$.

Theorem 2. *Let G be a program such that shp is inductive for $Init$ and $Init \models cnt(\ell_{init})$. If for all $e \in E$, $VC(e)$ holds, then for $\ell \in V$, $Reach(\ell) \models cnt(\ell)$.*

Proof. By Theorem 1, cnt is inductive for $Init$ relative to shp . Let $\mathcal{M} \in Reach(\ell)$, and let P be a path and $\mathcal{M}_{init} \in Init$ as guaranteed for members of $Reach(\ell)$. We prove the following claim by induction on the length of P :

If for all $e \in E$, $VC(e)$ holds, then for $\ell \in V$, $Reach(\ell) \models cnt(\ell)$ and $Reach(\ell) \models shp(\ell)$.

If P is empty, then $\mathcal{M} \in Init$ and the claim holds.

If P is not empty, let $e = (\ell_0, \ell)$ be the last edge of P , and let P_0 be the path obtained from P by removing e . Let \mathcal{M}_0 be a memory structure such that $\langle P_0, \mathcal{M}_{init} \rangle \rightsquigarrow^* \mathcal{M}_0$ and $\langle \lambda(e), \mathcal{M}_0 \rangle \rightsquigarrow \mathcal{M}$. Let $\bar{d}_{Y_{\lambda(e)}}$ be a tuple of M elements such that $\langle \lambda(e), \mathcal{M}_0 \rangle \rightsquigarrow_{\bar{d}_{Y_{\lambda(e)}}} \mathcal{M}$. By the induction hypothesis, $s_{\mathcal{M}_0}, h_{\mathcal{M}_0} \models shp(\ell_0)$ and $\mathcal{M}_0 \models cnt(\ell_0)$. Since shp is inductive, and since cnt is inductive relative to shp , $s_{\mathcal{M}}, h_{\mathcal{M}} \models shp(\ell)$. and $\mathcal{M} \models cnt(\ell)$.

Remark 3. In the proofs in this appendix only case 1. of Lemma 9 is used. The purpose of case 2. of Lemma 9 is to make the verification conditions less strict, in the sense that they require nothing of aborted executions.

